


WORKLINE  
22M LED INTEGRATED

INSTRUCTIONS FOR USE

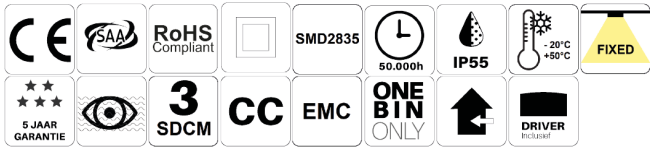

IMPORTANT

PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS. WARNINGS AND CAUTION. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED.

FAILURE TO DO SO MAY CAUSE ADMAGE AND / OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY.

PLEASE KEEP INSTURCTIONS SAFE FOR FUTURE USE.

DETAIL PICTURES



SPECIFICATIONS

Item No	130 WL181054
Input Voltage	AC 220-240V 50/60Hz
Bulb Type	10W SMD LED X 5
Safety Level	Class II
Lamp Lumens	5 x 1200 Lm
Color Temperature	4000K
Lamp Light Angle	180°
LED Life Time	50.000hrs
Power Cord Length	4M Spacing Between Light Modules
Cable	3G1.5MM H07RN-F Yellow Rubble Cabel
Working temperature	- 15 °C ~ 55°C

## USER MANUAL

1. This fitting is for use with 220V supply only.
2. The workline lights should be positioned in a way that it does not cause an obstruction to personal or machinery.
3. Do not connect the workline lights to any power source until it is fully fitted into position.
4. The first LED module should be positioned to provide adequate cable length to the supply point, and should be suitably secured by strapping or similar restraint.
5. Where practical, it is recommended that a cable tie is used on each side of the module.
6. Connecting the fitting to the power supply must be done with care.
7. Ensure no personnel are in contact with the workline lights when you switch it on. Immediately check each LED module to ensure that no danger is present.
8. Protect the power cord from any contact with sharp objects, chemicals or hot surfaces.
9. Do not remove the plug from the mains supply by pulling on the power cord.
10. Do not switch the lines on when it is coiled.

## MAINTENANCE

A daily check is recommended to inspect for any physical damage or abrasions to the cable, site fixing and mounting, and the connection to the power source.

The LED lamp modules are sealed for life and must not be modified in any way. Any alterations will invalidate the guarantee.

## GUARANTEE

This product is guaranteed for a period of 5 years from the date of purchase. The guarantee is invalid in the case of improper use, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the I.E.E. Wiring Regulations. Should this product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected. We reserve the right to alter specifications without prior notice.

