




24
Page 161




72R
Page 163




49
Page 167




73R
Page 165



50
Page 169



51
Page 171



24



Specification:

Suitable for PCB 30mm

Max. LED power: 38.4w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 49mm, (H) 37.5mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



Model 24



PMMA Diffuser

(Opal, light trans. >63%)

(New opal, light trans. >74%)

(Frost, light trans. >89%)

(Clear, light trans. >95%)

Black Diffuser

(Black, light trans. >22%)

Installing accessories:



Aluminium Endcap
(with/without hole)



Spring Clip



(Optional)

Joiners 180°A




(Optional)


Joiners 90°A



(Optional)

Joiners 120°A

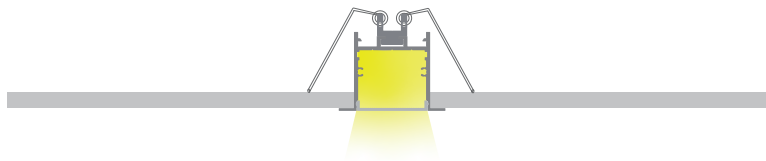



72R



Specification:

Suitable for PCB 45mm

Max. LED power: 57.6w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 63.9mm, (H) 45mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 5000mm.

Aluminium Profile



Model 72R



PMMA Diffuser

(Opal, light trans. >60%)

(New opal, light trans. >74%)

Installing accessories:



Aluminium Endcap
(with/without hole)



Spring Clip





Joiners 90°A
(Optional)




Joiners 180°A
(Optional)



Joiners 120°A
(Optional)

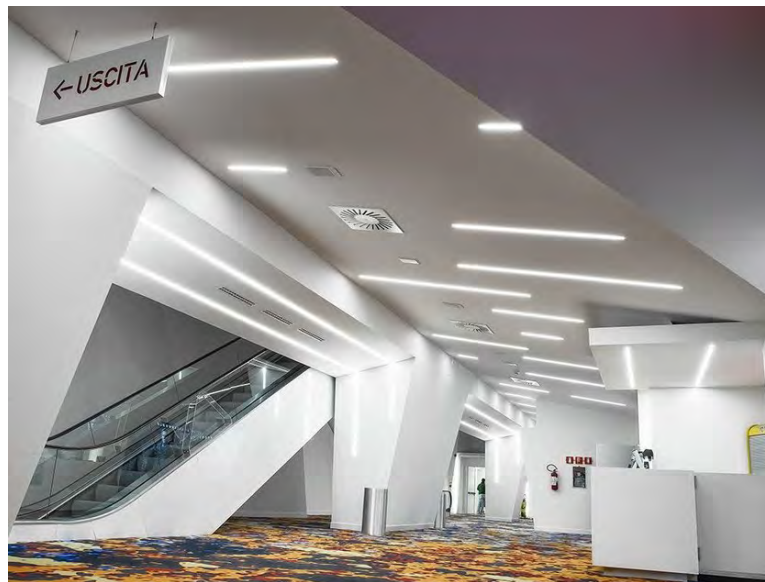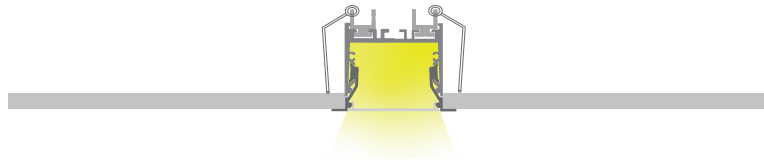



73R



Specification:

Suitable for PCB 38mm

Max. LED power: 57.6w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 73.9mm, (H) 45mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 5000mm.

Aluminium Profile



Model 73R



PMMA Diffuser

(New opal, light trans. >74%)

Installing accessories:



Aluminium Endcap
(with/without hole)



Spring Clip



(Optional)

Joiners 90°A



(Optional)

Joiners 90°B



(Optional)

Joiners 120°A




(Optional)


Joiners 180°A



(Optional)

Joiners 120°B

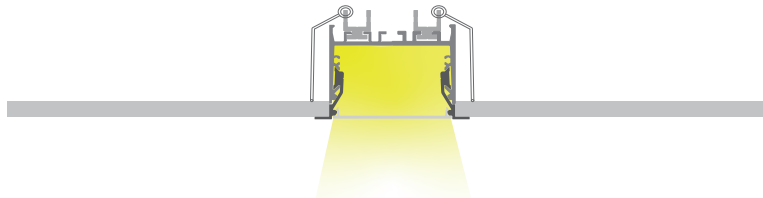



49



Specification:

| | |
|--|--|
| Suitable for PCB | 50mm |
| Max. LED power: | 38.4w/m |
| Installation: | Recessed |
| Material: | Extruded Aluminium 6063 |
| Finish: | Silver anodised, Black or White * |
| Diffuser: | PMMA flexible diffuser, can be 25m continuous rolled |
| Length: | 2000mm or 2500mm continuous ** |
| Size: | Profile (W) 80mm, (H) 25mm |
| Driver installation: | Remote driver required |
| * Custom powder coated colour upon request. Surcharge apply. | |
| ** Profile sold per metre. Can be cut to suit any length up to 6000mm. | |

Aluminium Profile



Model 49



PMMA Diffuser

(Opal, light trans. >60%)

(New opal, light trans. >74%)

Installing accessories:



Aluminium Endcap
(with/without hole)



Spring Clip




Joiners 90°A
(Optional)




Joiners 180°A
(Optional)



Joiners 120°A
(Optional)

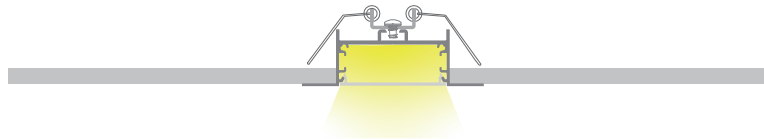



Recessed-Architectural Series

Aluminium Profile



Model 50

Specification:

| | |
|----------------------|-----------------------------------|
| Suitable for PCB | 55mm |
| Max. LED power: | 57.6w/m |
| Installation: | Recessed |
| Material: | Extruded Aluminium 6063 |
| Finish: | Silver anodised, Black or White * |
| Diffuser: | PC flexible diffuser |
| Length: | 2000mm or 2500mm continuous ** |
| Size: | Profile (W) 91mm, (H) 35mm |
| Driver installation: | Remote driver required |

* Custom powder coated colour upon request. Surcharge apply.
 ** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PC Diffuser
(Opal, light trans. >55%)


Installing accessories:




Aluminium Endcap
(without hole)



Spring Clip

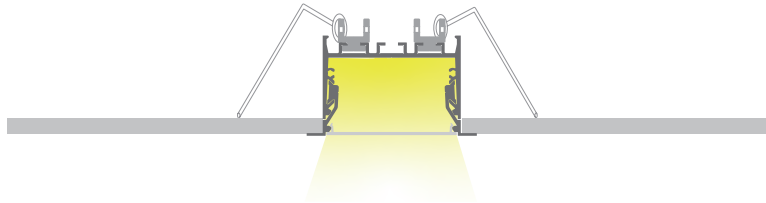



51



Specification:

Suitable for PCB 14mm

Max. LED power: 19.2w/m

Installation: Wall flush

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 19.5mm, (H) 50mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



Model 51



PMMA Diffuser

(Opal, light trans. >52%)
 (Milky, light trans. >65%)
 (Frost, light trans. >81%)
 (Clear, light trans. >95%)

PC Diffuser

(Opal, light trans. >52%)

Installing accessories:



Aluminium Endcap
(without hole)



Spring Clip

