

















LED^oSign
YOUR LIGHTING COMPANY



Profielen
Catalogus 2020

Index

	●	Index of series	3
	●	Led profiles Surface	9
	●	Led profiles Recessed	31
	●	Led profiles Corner	45
	●	Led profiles Surface & Suspension	57
	●	Led profiles Waterproof	73
	●	Led profiles Step and Stair	87
	●	Led profiles Round	96
	●	Led profiles Wall	103
	●	Led profiles Driver Built-in	117
	●	Led profiles Trimless -Architectural	131
	●	Led profiles Surface & Suspension -Architectural ...	141
	●	Led profiles Recessed - Architectural	159
	●	Led profiles Plaster in Trimless	173
	●	Led profiles Bend & Curved	191

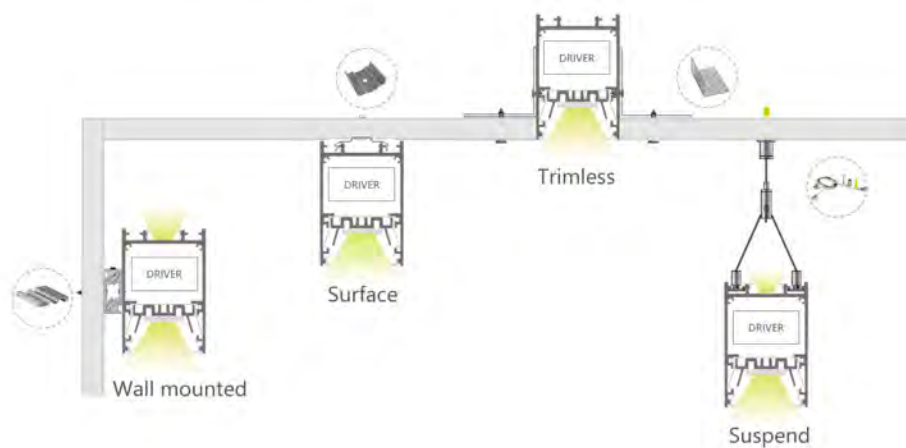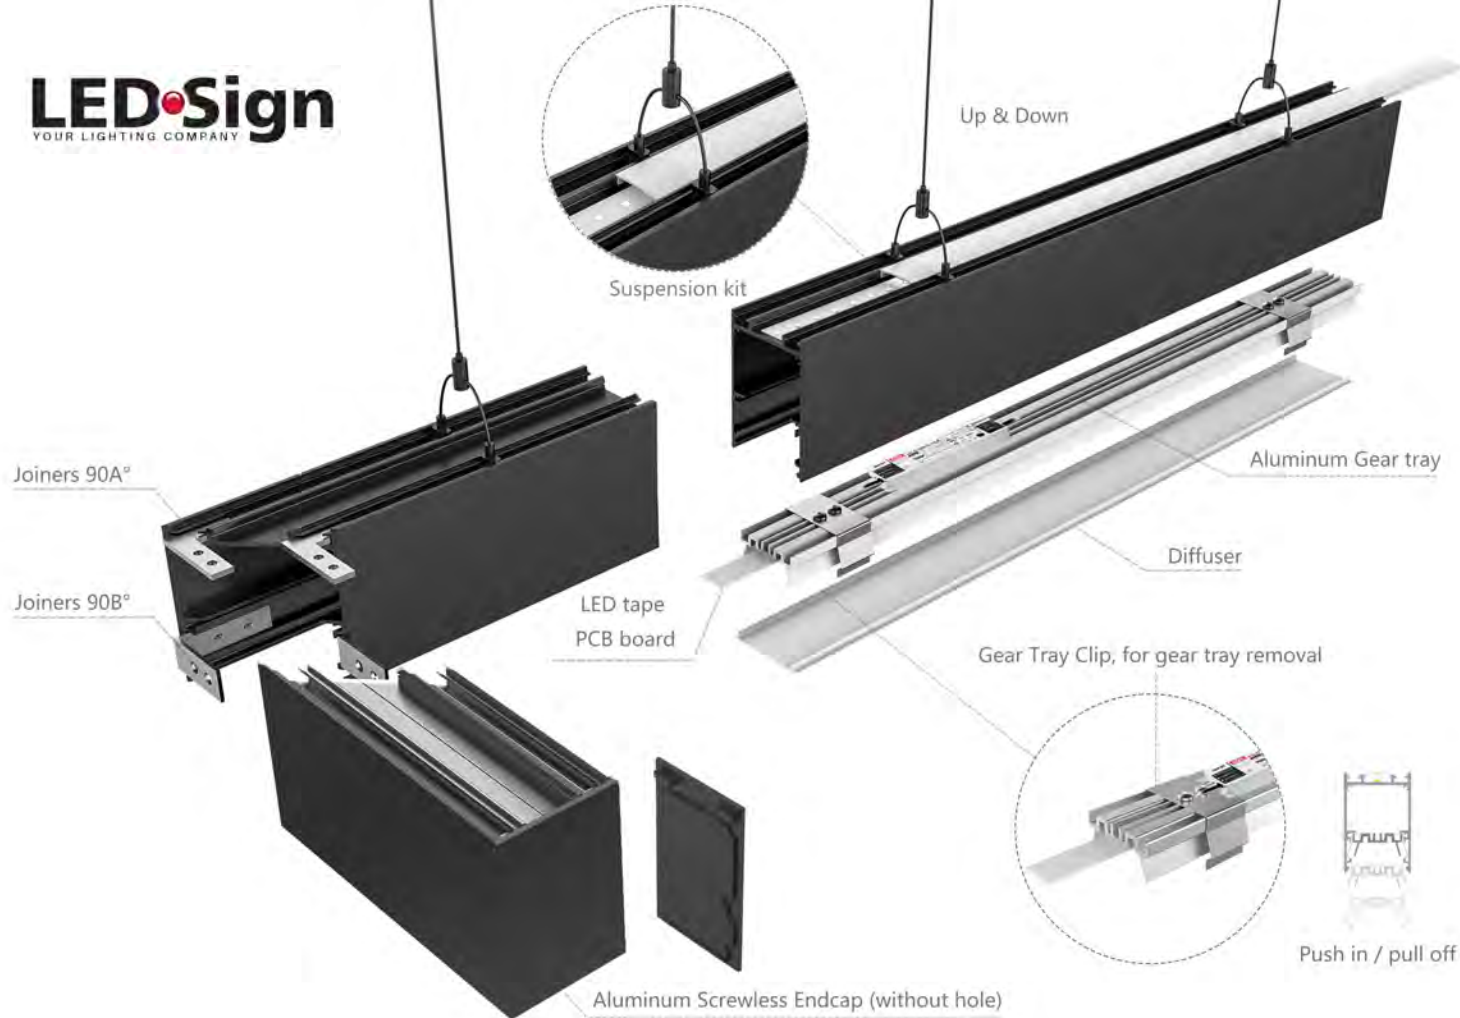

SURFACE



Model number	8	10	12	13	19	18	52
Pages	Page 11	Page 13	Page 15	Page 17	Page 19	Page 21	Page 11
Dimension (W x H)	17.1*8.5mm	17.1*15.2mm	23.5*10.9mm	15.9*6mm	8*9mm	8*6mm	17.1*13.7mm
Max. led power	14.4W/m	19.2W/m	19.2W/m	14.4W/m	9.6W/m	9.6W/m	14.4W/m
Max. length	6000mm	6000mm	6000mm	6000mm	4000mm	4000mm	6000mm




Model number	21	39	22	54	14	15
Pages	Page 11	Page 23	Page 25	Page 27	Page 29	Page 29
Dimension (W x H)	17.1*12.8mm	17.1*17.8mm	16*15.4mm	36.7*25mm	19.7*19.8mm	319.5*19.6mm
Max. led power	14.4W/m	19.2W/m	19.2W/m	19.2W/m	19.2W/m	19.2W/m
Max. length	6000mm	4000mm	6000mm	6000mm	6000mm	6000mm

RECESSED








Model number	7	9	11	16	56	17
Pages	Page 31	Page 33	Page 35	Page 37	Page 39	Page 41
Dimension (W x H)	23*8.5mm	23*15.2mm	30.6*10.9mm	15.2*6mm	23*19.2mm	14*9mm
Max. led power	14.4W/m	19.2W/m	19.2W/m	14.4W/m	19.2W/m	9.6W/m
Max. length	6000mm	6000mm	6000mm	4000mm	6000mm	4000mm






CORNER



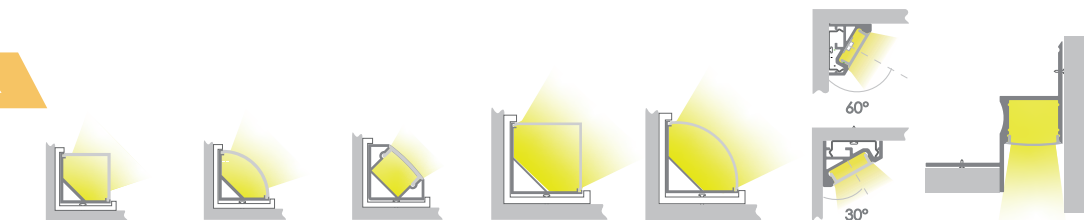


Model number	1	2	3	4	5	6	66
Pages	Page 45	Page 45	Page 47	Page 49	Page 49	Page 51	Page 53
Dimension (W x H)	16*16mm	16*16mm	18.4*18.4mm	30*30mm	30*30mm	20*16mm	55.5*44.6mm
Max. led power	14.4W/m	14.4W/m	14.4W/m	14.4W/m	14.4W/m	9.6W/m	19.2W/m
Max. length	6000mm	6000mm	6000mm	6000mm	6000mm	6000mm	6000mm







SURFACE & SUSPENSION

					
Model number	33	34	45	46	47
Pages	Page 57	Page 59	Page 61	Page 61	Page 61
Dimension (W x H)	20*20mm	20*40mm	19.5*19.2mm	19.5*19.2mm	19.5*16.3mm
Max. led power	19.2W/m	19.2W/m	19.2W/m	19.2W/m	19.2W/m
Max. length	6000mm	6000mm	6000mm	6000mm	6000mm


					
Model number	27	48	26	31	30
Pages	Page 63	Page 63	Page 65	Page 67	Page 67
Dimension (W x H)	19.5*12.5mm	19.5*28.4mm	25*29.7mm	19.5*26.3mm	19.5*25.9mm
Max. led power	19.2W/m	19.2W/m	19.2W/m	19.2W/m	19.2W/m
Max. length	6000mm	6000mm	6000mm	6000mm	6000mm

			
Model number	32	28	29
Pages	Page 67	Page 69	Page 69
Dimension (W x H)	19.5*35.4mm	19.5*17.4mm	19.5*17.4mm
Max. led power	19.2W/m	19.2W/m	28.8W/m
Max. length	6000mm	6000mm	6000mm

WATERPROOF

						
	IP67	IP65	IP65	walk over IP67	walk over IP67	drive over IP67
Model number	62	66	38	35	63	64
Pages	Page 73	Page 75	Page 77	Page 79	Page 81	Page 83
Dimension (W x H)	17.1*17mm	19.1*8mm	28.6*11.2mm	26*25mm	30.5*30mm	69*65mm
Max. led power	14.4W/m	14.4W/m	14.4W/m	19.2W/m	19.2W/m	19.2W/m
Max. length	4000mm	4000mm	4000mm	6000mm	6000mm	6000mm

STEP AND STAIR

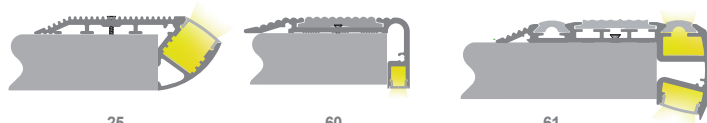


Model number	25	60	61
Pages	Page 87	Page 89	Page 91
Dimension (W x H)	67.5*27.8mm	60*25.7mm	82.4*37.9mm
Max. led power	19.2W/m	9.6W/m	19.2W/m
Max. length	6000mm	6000mm	6000mm

ROUND









Model number	65	37	53
Pages	Page 95	Page 97	Page 99
Dimension (W x H)	φ30	φ34	φ60
Max. led power	28.8W/m	28.8W/m	28.8W/m
Max. length	4000mm	5000mm	6000mm

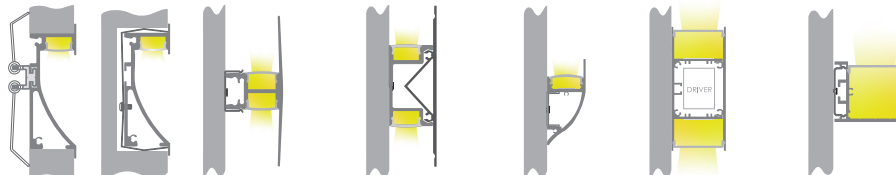



WALL







Model number	23	94	92	93	90	58
Pages	Page 103	Page 105	Page 107	Page 109	Page 111	Page 113
Dimension (W x H)	25.4*70mm	27.7*70mm	23.6*83mm	17.5*40.7mm	35*83mm	42*35mm
Max. led power	19.2W/m	14.4W/m	14.4W/m	19.2W/m	19.2W/m	38.4W/m
Max. length	6000mm	6000mm	4000mm	4000mm	6000mm	6000mm

DRIVER BUILT-IN PROFILE


						
Model number	71F	71S	71SH	76		
Pages	Page 117	Page 117	Page 117	Page 119		
Dimension (W x H)	35*68mm	31.2*78mm	31.2*88mm	46*68mm		
Max. led power	38.4W/m	38.4W/m	38.4W/m	38.4W/m		
Max. length	6000mm	6000mm	6000mm	6000mm		

				
Model number	57	75	74HD	77
Pages	Page 121	Page 123	Page 125	Page 127
Dimension (W x H)	50*75mm	60*90mm	80*100mm	74*77mm
Max. led power	57.6W/m	57.6W/m	57.6W/m	57.6W/m
Max. length	6000mm	6000mm	6000mm	6000mm


TRIMLESS-ARCHITECTURAL

				
Model number	40	41	42	43
Pages	Page 131	Page 133	Page 135	Page 137
Dimension (W x H)	54*48mm	67*48mm	76*48mm	96*48mm
Max. led power	28.8W/m	38.4W/m	57.6W/m	57.6W/m
Max. length	6000mm	6000mm	6000mm	6000mm


SURFACE & SUSPENSION-ARCHITECTURAL

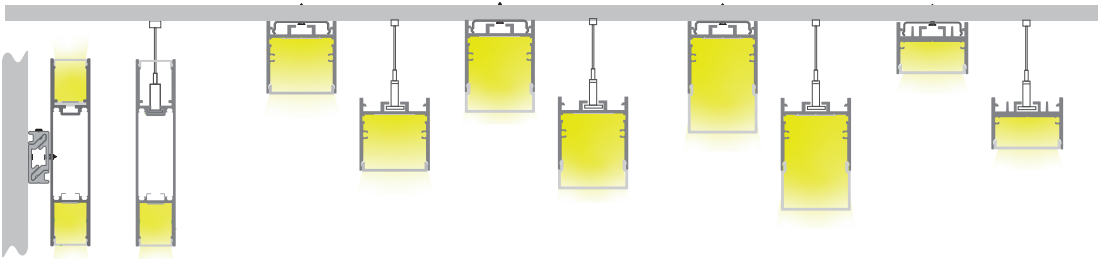

Model number	20	70F	70S	70SH	69F
Pages	Page 141	Page 143	Page 143	Page 143	Page 145
Dimension (W x H)	25*120mm	35*37.5mm	35*47.5mm	35*57.5mm	35*25.4mm
Max. led power	38.4W/m	38.4W/m	38.4W/m	38.4W/m	38.4W/m
Max. length	4000mm	6000mm	6000mm	6000mm	6000mm

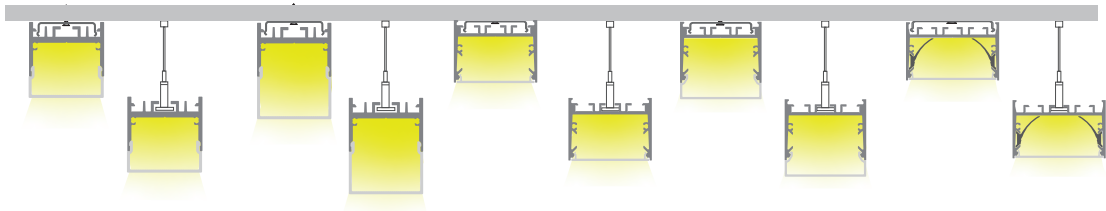


Model number	69S	69SH	72F	72S	73F
Pages	Page 145	Page 145	Page 147	Page 147	Page 149
Dimension (W x H)	35*35.4mm	35*45.4mm	50*37.5mm	50*47.5mm	60*37.5mm
Max. led power	38.4W/m	38.4W/m	38.4W/m	57.6W/m	57.6W/m
Max. length	6000mm	6000mm	6000mm	6000mm	6000mm

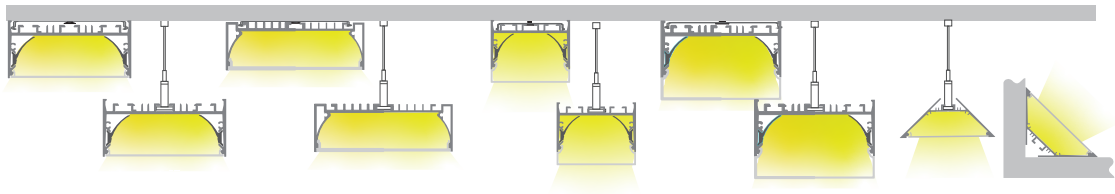


Model number	74F	55	73S	74S	79
Pages	Page 151	Page 153	Page 149	Page 151	Page 155
Dimension (W x H)	80*37.5mm	102*31mm	60*47.5mm	80*52.5mm	90*37.5mm
Max. led power	57.6W/m	57.6W/m	57.6W/m	57.6W/m	57.6W/m
Max. length	6000mm	4000mm	6000mm	6000mm	6000mm

RECESSED-ARCHITECTURAL



Model number	24	72R	49	73R	50	51
Pages	Page 159	Page 161	Page 165	Page 163	Page 167	Page 169
Dimension (W x H)	49*37.5mm	63.9*45mm	80*25mm	73.9*45mm	91*35mm	19.5*50mm
Max. led power	38.4W/m	57.6W/m	38.4W/m	57.6W/m	57.6W/m	19.2W/m
Max. length	6000mm	5000mm	6000mm	5000mm	4000mm	6000mm

PLASTER IN TRIMLESS

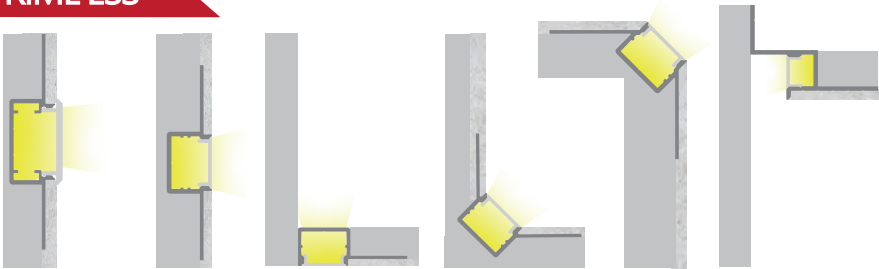


Model number	83	84	85	86	87	88
Pages	Page 173	Page 175	Page 177	Page 179	Page 181	Page 183
Dimension (W x H)	66.4*16.4mm	59*13.6mm	38.8*13.6mm	49.8*26.1mm	55.6*23.7mm	42.5*28.5mm
Max. led power	19.2W/m	19.2W/m	19.2W/m	19.2W/m	19.2W/m	19.2W/m
Max. length	2500mm	2500mm	2500mm	2500mm	2500mm	2500mm

BEND & CURVED



Model number	59
Pages	Page 191
Dimension (W x H)	19.4*6.5mm
Max. led power	14.4W/m
Max. length	3000mm




89	78
Page 185	Page 187
28*9mm	86.5*16mm
9.6W/m	14.4W/m
2500mm	6000mm

Catalogue


1 SURFACE

- 3 CORNER
- 5 WATERPROOF
- 7 ROUND
- 9 DRIVER BUILT-IN PROFILE
- 11 SURFACE & SUSPENSION-ARCHITECTURAL
- 13 PLASTER IN TRIMLESS


- 2 RECESSED
- 4 SURFACE & SUSPENSION
- 6 STEP AND STAIR
- 8 WALL
- 10 TRIMLESS-ARCHITECTURAL
- 12 RECESSED-ARCHITECTURAL
- 14 BEND & CURVED




8
Page 11




10
Page 13




12
Page 15




13
Page 17




19
Page 19




18
Page 21




52
Page 11




21
Page 11




39
Page 23




22
Page 25




54
Page 27




14
Page 29




15
Page 29




8



52



21



Specification:

Suitable for PCB:	12mm
Max. LED power:	14.4w/m
Installation:	Surface
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 17.1mm, (H) 8.5mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 6000mm.	

Aluminium Profile



Model 8



Model 52



Model 21



- PMMA Diffuser**
(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)
- PC Diffuser**
(Opal, light trans. >50%)
- PMMA Diffuser**
(Milky, light trans. >65%)
- PC Diffuser**
(Clear, light trans. >94%)
- Black Diffuser**
(Black, light trans. >22%)

Installing accessories:



Plastic Endcap
(with/without hole)



Metal Clip



Plastic Endcap
(with/without hole)



Plastic Clip

(Optional)



Plastic Endcap
(with/without hole)



Adjustable Clip
(0-222° rotation)

(Optional)






Aluminium Profile



Model 10



10



Specification:

Suitable for PCB: 12mm

Max. LED power: 19.2w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 17.1mm, (H) 15.2mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)

PC Diffuser

(Opal, light trans. >50%)

Black Diffuser

(Black, light trans. >22%)

Installing accessories:



Plastic Endcap
(with/without hole)



Metal Clip




Adjustable Clip
(0-222° rotation)



Plastic Clip

(Optional)

(Optional)

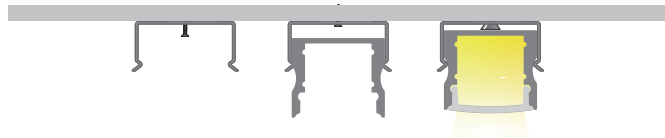




Aluminium Profile



Model 12



12



110°

Specification:

Suitable for PCB : 20mm

Max. LED power: 19.2w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 23.5mm, (H) 10.9mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >52%)

(Frost, light trans. >81%)

(Clear, light trans. >95%)



Black Diffuser

(Black, light trans. > 22%)

Installing accessories:



Plastic Endcap
(with/without hole)



Metal Clip




(Optional)

Adjustable Clip
(0-222° rotation)



(Optional)

Plastic Clip






Aluminium Profile



Model 13



13



Specification:

Suitable for PCB: 10mm

Max. LED power: 14.4w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 15.9mm, (H) 6mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PC Diffuser
(Opal, light trans. >50%)
(Frost, light trans. >65%)

Installing accessories:



Plastic Endcap
(with/without hole)





Metal Clip



(Optional)

Adjustable Clip
(0-222° rotation)



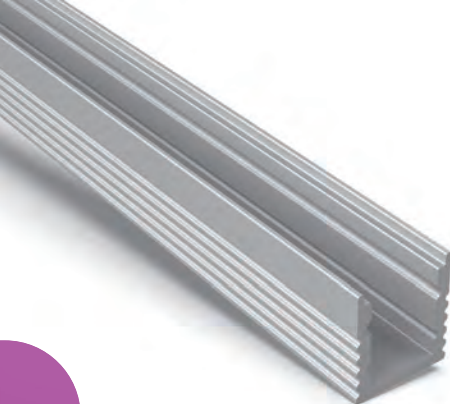

19



Aluminium Profile



Model 19



Specification:

Suitable for PCB: 5mm

Max. LED power: 9.6w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 5.7mm, (H) 9mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



PC Diffuser

(Opal, light trans. >50%)
(Clear, light trans. >94%)



Black Diffuser

(Black, light trans. > 22%)

For 2110 120led 4mm strip only.



Installing accessories:




Plastic Endcap
(with/without hole)



Metal Clip

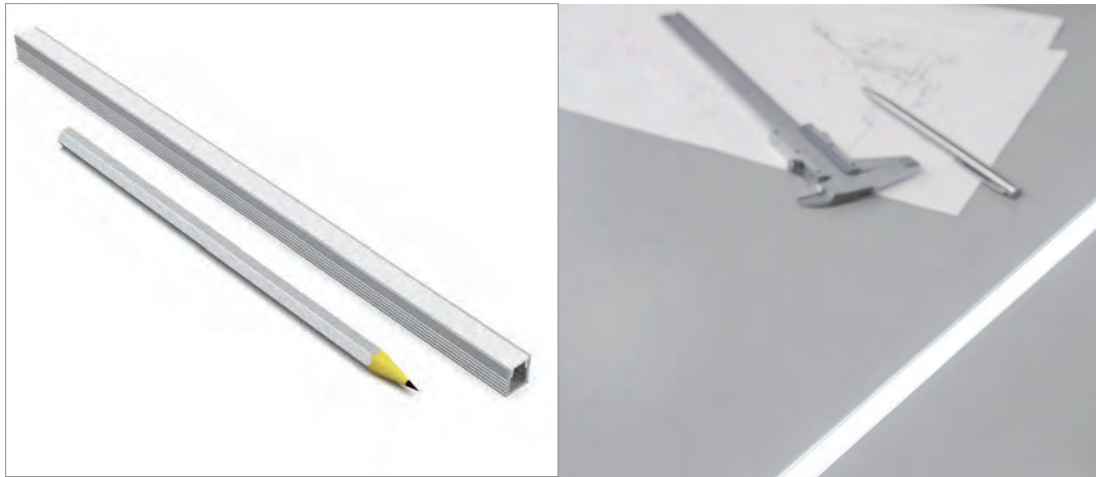



18



Aluminium Profile

Specification:

Suitable for PCB: 5mm

Max. LED power: 9.6w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 5.7mm, (H) 6mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



Model 18



PC Diffuser

(Opal, light trans. >50%)

(Clear, light trans. >94%)



For 2110 120led 4mm strip only.

Installing accessories:



Plastic Endcap
(with/without hole)





Only 6mm height, SMALLEST in
profiles range




Aluminium Profile



Model 39



39

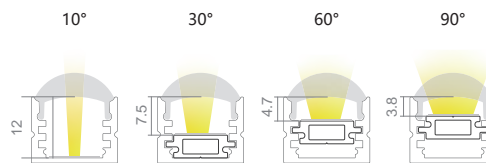

Specification:

Suitable for PCB: 10mm

Max. LED power: 19.2w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 17.1mm, (H) 17.8mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



PC Diffuser
(Clear, light trans. >94%)

Installing accessories:



Plastic Endcap
(with/without hole)





Metal Clip



Adjustable Clip
(0-222° rotation)



Plastic Clip

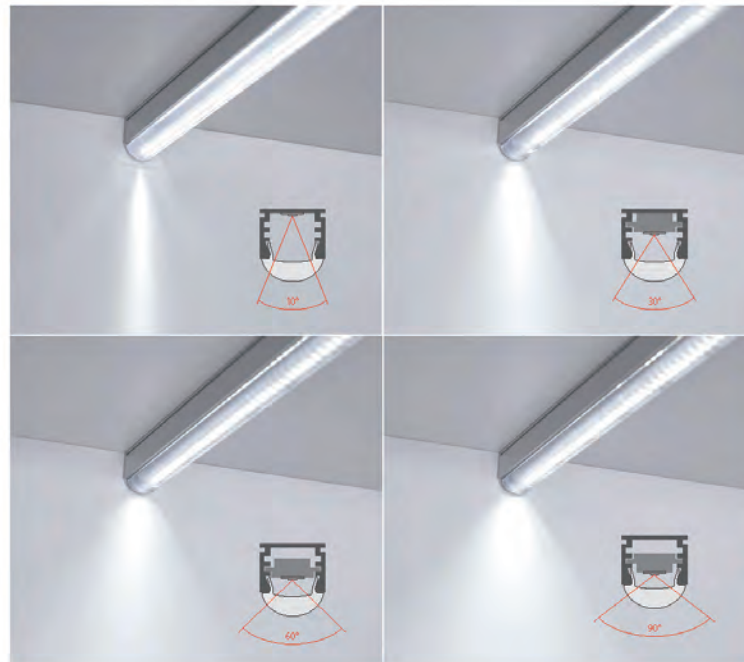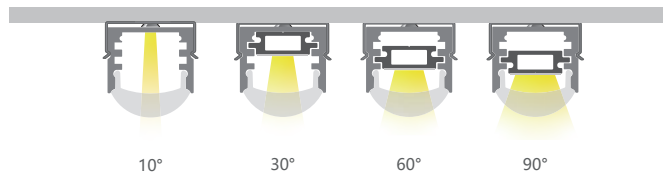




Aluminium Profile



Model 22



22



Specification:

Suitable for PCB: 12mm

Max. LED power: 19.2w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 16mm, (H) 15.4mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PC Diffuser
(Opal, light trans. >50%)

Installing accessories:



Aluminium Endcap
(with/without hole)





Metal Clip



(Optional)

Adjustable Clip
(0-222° rotation)

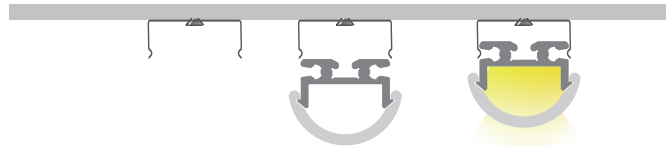



54



Aluminium Profile



Model 54

Specification:

Suitable for PCB: 15mm

Max. LED power: 19.2w/m

Installation: Surface mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White*

Diffuser: PPMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous**

Size: Profile (W) 36.7mm, (H) 25mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser

(Opal, light trans. >52%)

(Milky, light trans. >65%)

(Frost, light trans. >81%)

(Clear, light trans. >95%)


PC Diffuser

(Opal, light trans. >50%)


Installing accessories:




Aluminium CNC Endcap
(without hole)



Ceiling Wash






Floor Wash



Wall Wash





Specification:

Suitable for PCB	15mm
Max. LED power:	19.2w/m
Installation:	Surface
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 19.5mm, (H) 20.3mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 4000mm.	

Aluminium Profile



PMMA Diffuser
(Opal, light trans. >52%)
(Frost, light trans. >72%)



PMMA Diffuser
(Opal, light trans. >52%)
(Frost, light trans. >72%)



Black Diffuser
(Black, light trans. >22%)


Installing accessories:



Plastic Endcap
(with/without hole)




Plastic Endcap
(with/without hole)

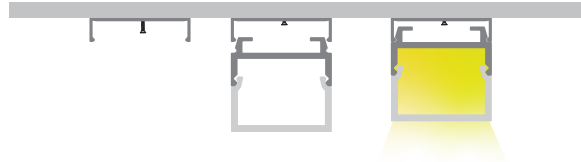


Catalogue

- 1 SURFACE
- 3 CORNER
- 5 WATERPROOF
- 7 ROUND
- 9 DRIVER BUILT-IN PROFILE
- 11 SURFACE & SUSPENSION-ARCHITECTURAL
- 13 PLASTER IN TRIMLESS


- 2 RECESSED
- 4 SURFACE & SUSPENSION
- 6 STEP AND STAIR
- 8 WALL
- 10 TRIMLESS-ARCHITECTURAL
- 12 RECESSED-ARCHITECTURAL
- 14 BEND & CURVED




7
Page 33




9
Page 35




11
Page 37





16
Page 39



56
Page 41



17
Page 4

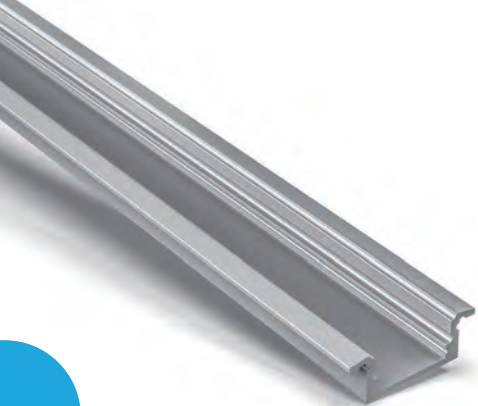

7



Specification:

Suitable for PCB 12mm

Max. LED power: 14.4w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 23mm, (H) 6.4mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



Model 7



PMMA Diffuser

(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)

PC Diffuser

(Opal, light trans. >50%)

Installing accessories:



Plastic Endcap
(with/without hole)





Metal Clip



Plastic Clip
(Optional)



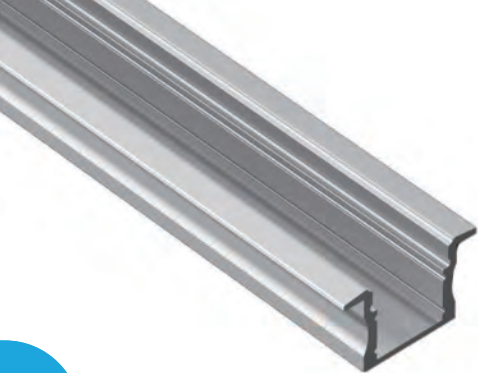

9



Specification:

Suitable for PCB 12mm

Max. LED power: 19.2w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 23mm, (H) 15.2mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



Model 9



PMMA Diffuser

(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)

PC Diffuser

(Opal, light trans. >50%)

Installing accessories:



Plastic Endcap
(with/without hole)



Metal Clip



(Optional)

Plastic Clip






Aluminium Profile



Model 11



11



Specification:

Suitable for PCB 20mm

Max. LED power: 19.2w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 30.6mm, (H) 10.9mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >52%)

(Frost, light trans. >81%)

(Clear, light trans. >95%)

Installing accessories:




Plastic Endcap
(with/without hole)




Metal Clip




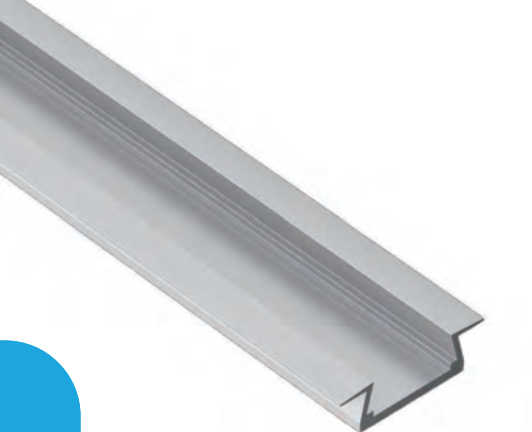

Aluminium Profile



Model 16



16



Specification:

Suitable for PCB 10mm

Max. LED power: 14.4w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 15.2mm, (H) 6mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



PC Diffuser
(Opal, light trans. >50%)
(Frost, light trans. >65%)

Installing accessories:



Plastic Endcap
(with/without hole)



Metal Clip






Aluminium Profile



Model 56



56



Specification:

Suitable for PCB 12mm

Max. LED power: 19.2w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 23mm, (H) 19.2mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)

PC Diffuser

(Opal, light trans. >50%)


Installing accessories:




Plastic Endcap
(with/without hole)



Spring Clip




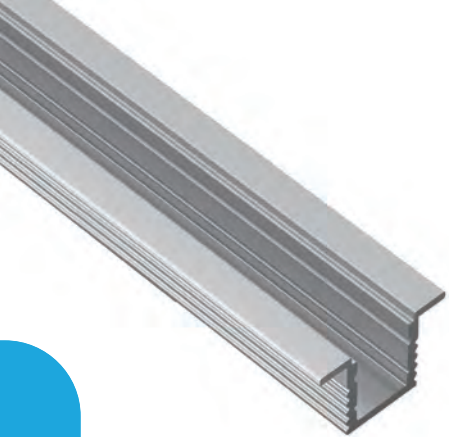

Aluminium Profile



Model 17



17



Specification:

Suitable for PCB 5mm

Max. LED power: 9.6w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 14mm, (H) 9mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



PC Diffuser
(Opal, light trans. >50%)
(Clear, light trans. >94%)

For 2110 120led 4mm strip only.


Installing accessories:



Plastic Endcap
(with/without hole)




Metal Clip

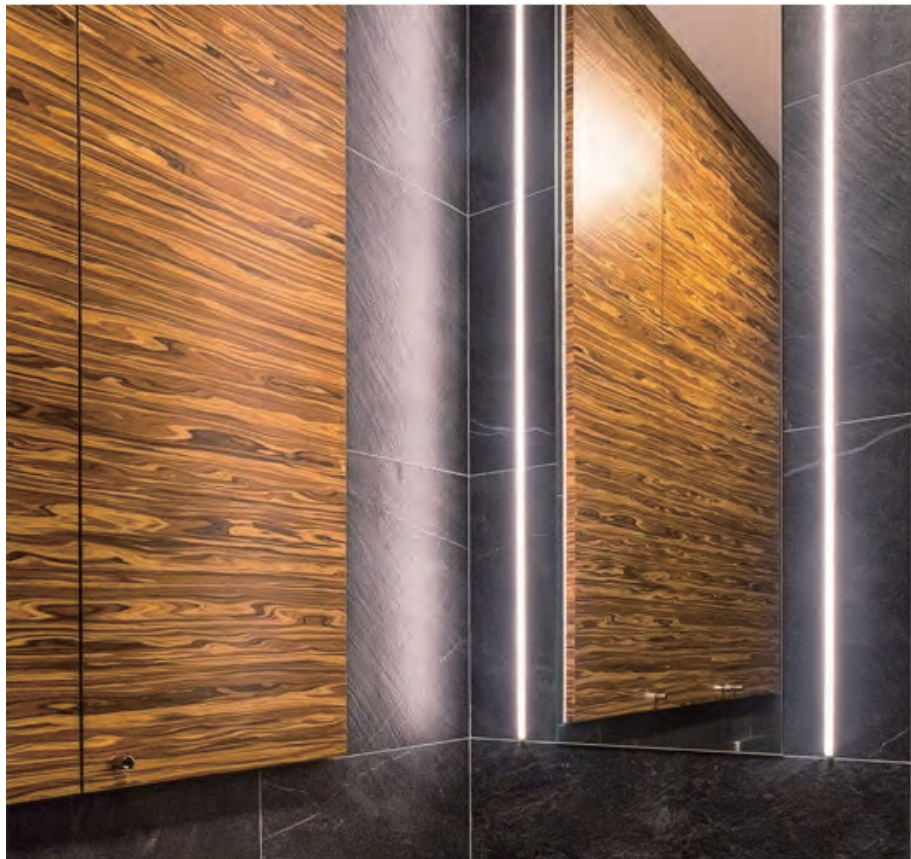


Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED




1
Page 47




2
Page 47




3
Page 49




4
Page 51



5
Page 51



6
Page 53



66
Page 55




Aluminium Profile




Model 1



Model 2



1



2



Specification:

Suitable for PCB 10mm

Max. LED power: 14.4w/m

Installation: Corner mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 16mm, (H) 16mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >52%)
(Frost, light trans. >81%)



PMMA Diffuser

(Opal, light trans. >42%)
(Milky, light trans. >49%)
(Frost, light trans. >54%)
(Clear, light trans. >95%)



PC Diffuser

(Opal, light trans. >50%)

Black Diffuser

(Black, light trans. >22%)

Installing accessories:



Plastic Endcap
(with/without hole)



Metal Clip



Plastic Endcap
(with/without hole)





Plastic Clip

(Optional)



(Optional)

Adjustable Clip
(0-222° rotation)






Aluminium Profile



Model 3



3



Specification:

Suitable for PCB 10mm

Max. LED power: 14.4w/m

Installation: Corner mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 18.4mm, (H) 18.4mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)

PC Diffuser

(Opal, light trans. >50%)

Black Diffuser

(Black, light trans. >22%)

Installing accessories:



Plastic Endcap
(with/without hole)





Metal Clip




Adjustable Clip
(0-222° rotation)




Plastic Clip
(Optional)





4



5



Aluminium Profile



Model 4



Model 5

Specification:

Suitable for PCB 20mm

Max. LED power: 14.4w/m

Installation: Corner mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 30mm, (H) 30mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PC Diffuser

(Opal, light trans. >50%)

(Clear, light trans. >94%)




PC Diffuser

(Opal, light trans. >50%)

(Clear, light trans. >94%)

Installing accessories:



Plastic Endcap
(with/without hole)



Metal Clip






Plastic Endcap
(with/without hole)



Plastic Clip
(Optional)



Adjustable Clip
(0-222° rotation)
(Optional)

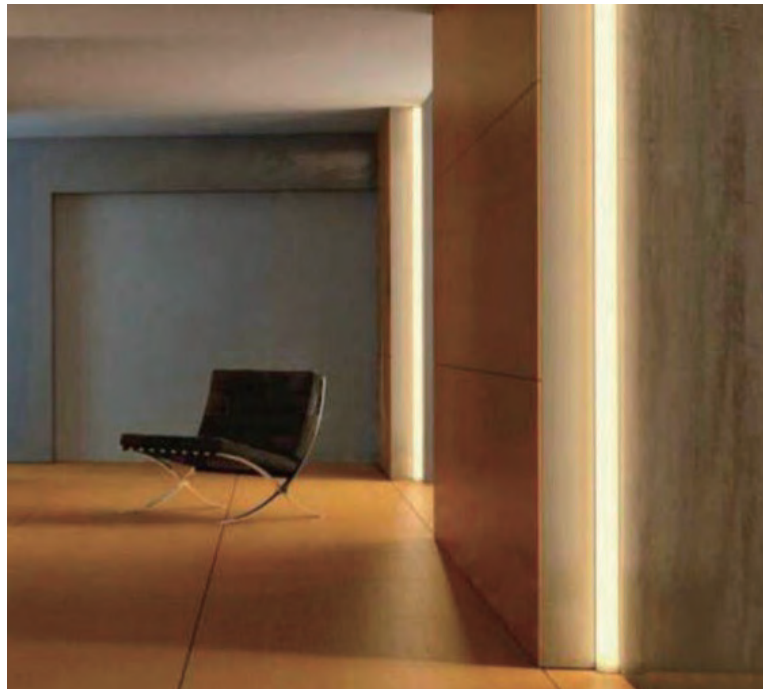




Aluminium Profile



Model 6



Specification:

Suitable for PCB 12mm

Max. LED power: 9.6w/m

Installation: Corner mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 20mm, (H) 16mm

Driver installation: Remote driver required








* Custom powder coated colour upon request. Surcharge apply.




** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PC Diffuser
(Opal, light trans. >50%)

Installing accessories:

	Plastic (with/without hole)	Endcap		Metal Clip
 (Optional)	Joiners 180°A		 (Optional)	Joiners 90°B
 (Optional)	Joiners 90°A		 (Optional)	Joiners 120°B
 (Optional)	Joiners 120°A			

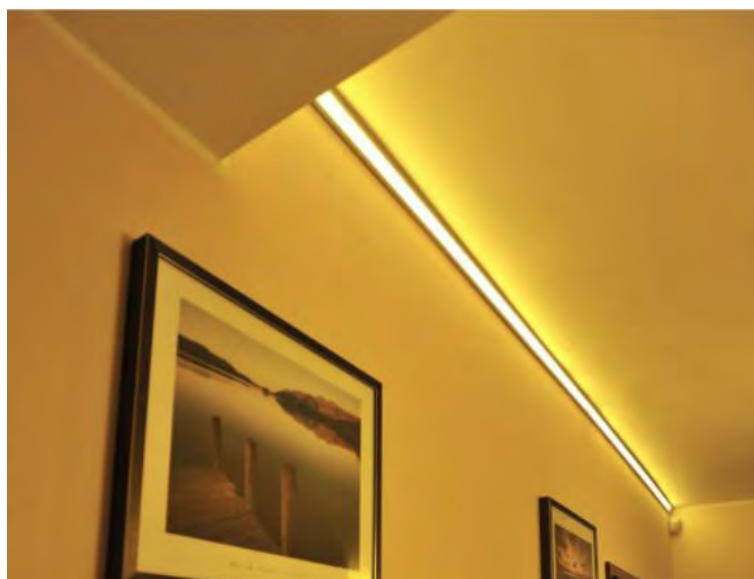




Aluminium Profile



Model 66



Specification:

Suitable for PCB 18mm

Max. LED power: 19.2w/m

Installation: Wall/Ceiling recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 55.5mm, (H) 46.6mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >52%)

(Frost, light trans. >81%)

(Clear, light trans. >95%)


PC Diffuser

(Opal, light trans. >50%)

Installing accessories:




Plastic Endcap
(with/without hole)




Catalogue

- 1 SURFACE
- 3 CORNER
- 5 WATERPROOF
- 7 ROUND
- 9 DRIVER BUILT-IN PROFILE
- 11 SURFACE & SUSPENSION-ARCHITECTURAL
- 13 PLASTER IN TRIMLESS


- 2 RECESSED
- 4 *SURFACE & SUSPENSION*
- 6 STEP AND STAIR
- 8 WALL
- 10 TRIMLESS-ARCHITECTURAL
- 12 RECESSED-ARCHITECTURAL
- 14 BEND & CURVED




33
Page 59




34
Page 61




45
Page 63




46
Page 63




47
Page 63




27
Page 65




48
Page 65




26
Page 67




31
Page 69




30
Page 69



32
Page 69



28
Page 71




29
Page 71



Aluminium Profile



Model 33



33



Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Surface/Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 20mm, (H) 20mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser
(Opal, light trans. >55%)



Black Diffuser
(Black, light trans. > 22%)

Installing accessories:



Plastic Endcap
(with/without hole)



Metal Clip



Suspension Kits



Joiners 90°A



Joiners 90°B



Joiners 120°A




Joiners 120°B



Joiners 180°A



Aluminium diffuser

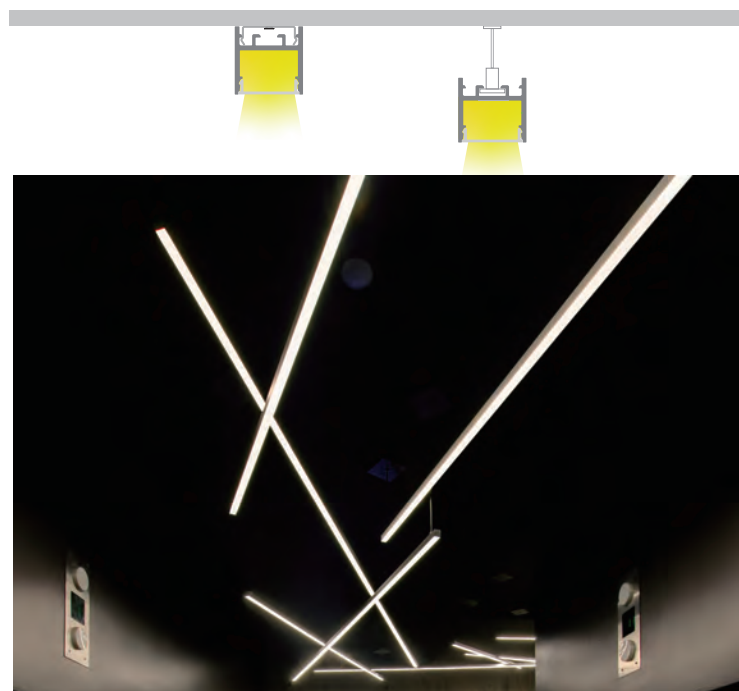




Aluminium Profile



Model 34



Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Surface/Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 20mm, (H) 40mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.













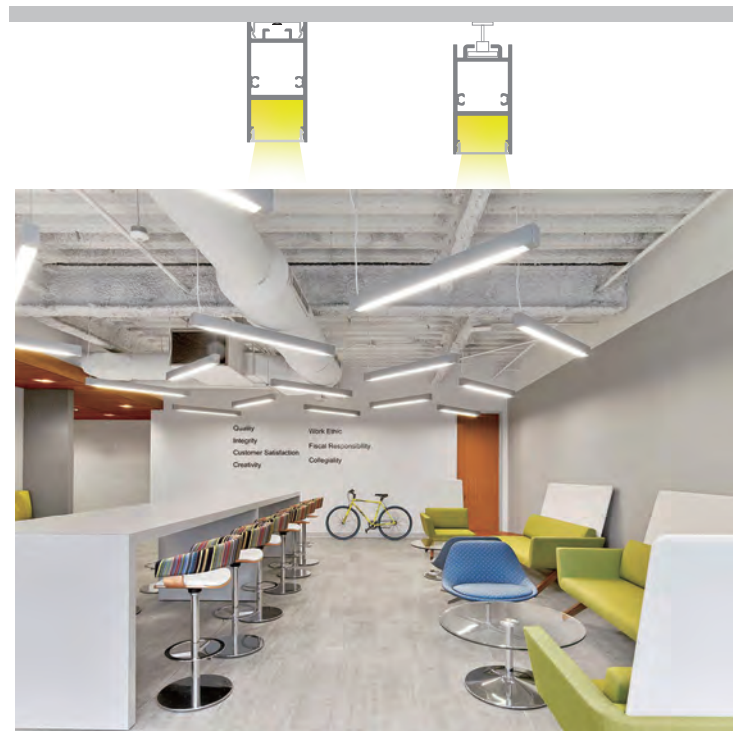
PMMA Diffuser
(Opal, light trans. >55%)



Black Diffuser
(Black, light trans. > 22%)

Installing accessories:

	CNC Aluminum Cap (without hole)		Metal Clip
 (Optional)	Aluminium Endcap (without hole)	 (Optional)	Suspension Kits
 (Optional)	Joiners 90°A	 (Optional)	Joiners 90°B
 (Optional)	Joiners 120°A	 (Optional)	Joiners 120°B
 (Optional)	Joiners 180°A	 (Optional)	Aluminium diffuser





Aluminium Profile




Model 45




Model 46




Model 47




45



46



47



Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 19.5mm, (H) 19.2mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >52%)
(Frost, light trans. >72%)



PMMA Diffuser

(Opal, light trans. >52%)
(Frost, light trans. >72%)



Black Diffuser

(Black, light trans. > 22%)



PMMA Diffuser

(Clear, light trans. >95%)

Installing accessories:



Plastic Endcap
(with/without hole)



Plastic Endcap
(with/without hole)



Plastic Endcap
(with/without hole)



Adjustable Clip
(0-222° rotation)



Joiners 120°A



Joiners 90°A



Metal Clip



Suspension Kits




Joiners 180°A



Joiners 90°B



Joiners 120°B

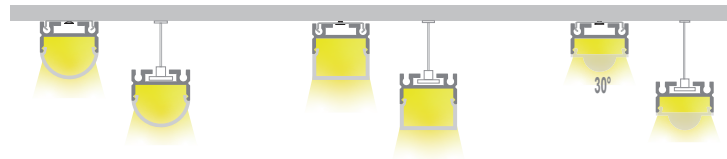




Aluminium Profile




Model 27




Model 48



27



48



Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 19.5mm, (H) 12.5mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >68%)











(Frost, light trans. >83%)






PMMA Diffuser

(Opal, light trans. >52%)



Installing accessories:

	Aluminium Endcap (with/without hole)		Metal Clip
	Aluminium Endcap Code: AT5H-Cap (with/without hole) Code: AT5H-Cap-H	 (Optional)	Joiners 180°A
 (Optional)	Adjustable Clip (0-222° rotation)	 (Optional)	Joiners 90°A
 (Optional)	Joiners 90°B	 (Optional)	Joiners 120°A
 (Optional)	Joiners 120°B	 (Optional)	Suspension Kits

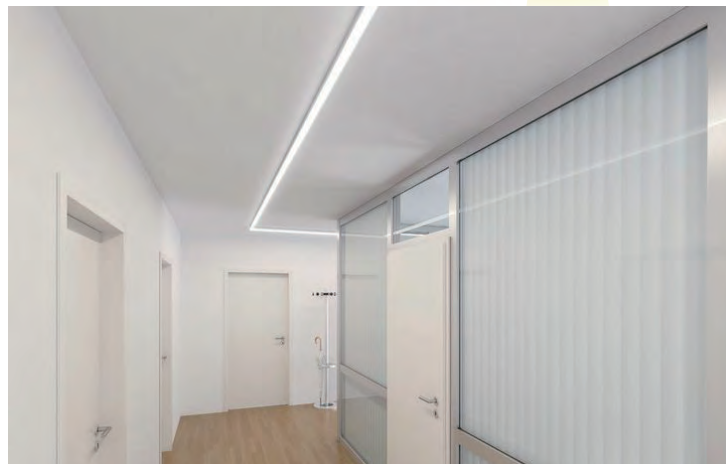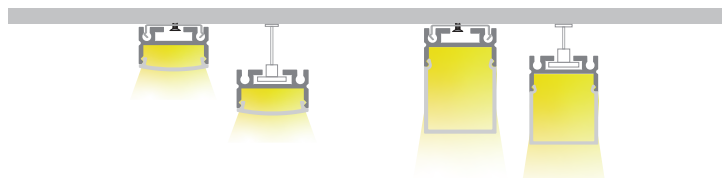



26



Aluminium Profile



Model 26



Specification:

Suitable for PCB 10mm

Max. LED power: 28.8w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser

Length: 2000mm or 2500mm continuous, lens in 350mm**

Size: Profile (W) 25mm, (H) 29.7mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser
(Clear, light trans. >95%)

Installing accessories:



Aluminium Endcap
(with/without hole)



(Optional)

Suspension Kits



(Optional)

Joiners 180°A



(Optional)

Joiners 90°A



(Optional)

Joiners 90°B




(Optional)


Joiners 120°A




(Optional)

Joiners 120°B

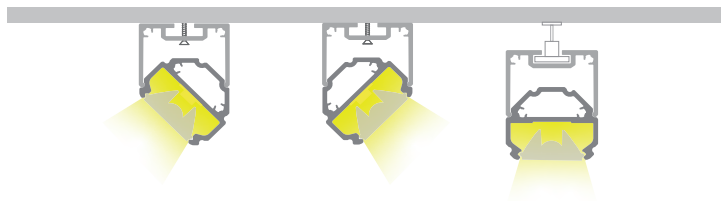




31



30



32



Aluminium Profile



Model 31



Model 30



Model 32

Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Surface/Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 19.5mm, (H) 26.3mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >52%)

(Frost, light trans. >72%)



PMMA Diffuser

(Opal, light trans. >52%)

(Frost, light trans. >72%)





PMMA Diffuser

(Opal, light trans. >52%)


Installing accessories:

	Aluminium Endcap (with/without hole)		Metal Clip
	Aluminium Endcap (with/without hole)		Suspension Kits (Optional)
	Aluminium Endcap (with/without hole)		Joiners 90°A (Optional)
	Joiners 90°B (Optional)		Joiners 120°A (Optional)
	Joiners 120°B (Optional)		Joiners 180°A (Optional)

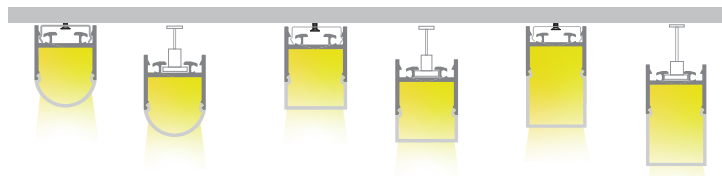




28



29



Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Surface/Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous, lens in 350mm9 **

Size: Profile (W) 19.5mm, (H) 17.4mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.


Aluminium Profile



Model 28



Model 29




PMMA Diffuser


(Opal, light trans. >52%)
(Frost, light trans. >81%)

PMMA Diffuser

(Clear, light trans. >95%)




Clear lens 30°



Clear lens 60°


Installing accessories:

	Aluminium Endcap (with/without hole)		Metal Clip
	Aluminium Endcap (with/without hole)	 (Optional)	Joiners 90°A
 (Optional)	Suspension Kits	 (Optional)	Joiners 120°A
 (Optional)	Joiners 90°B	 (Optional)	Joiners 180°A
 (Optional)	Joiners 120°B		

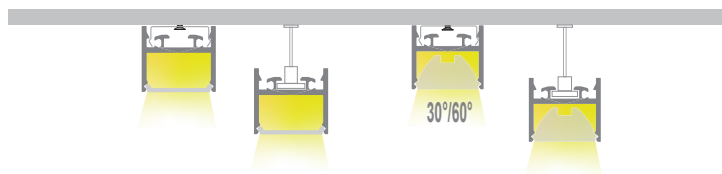


Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	<i>WATERPROOF</i>	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED




62
Page 75




66
Page 77




38
Page 79




35
Page 81



63
Page 83



64
Page 85



62



Specification:

Suitable for PCB 12mm

Max. LED power: 14.4w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 17.1mm, (H) 17mm

Driver installation: Remote driver required


* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.

Aluminium Profile



Model 62

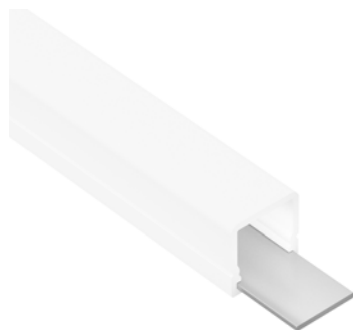

PMMA Diffuser
(Opal, light trans. >52%)

Installing accessories:




Plastic Endcap
(with/without hole)





Metal Clip



Plastic Clip

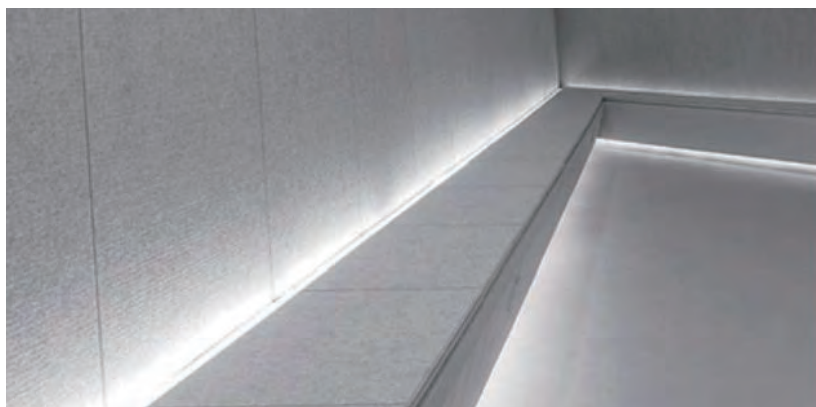

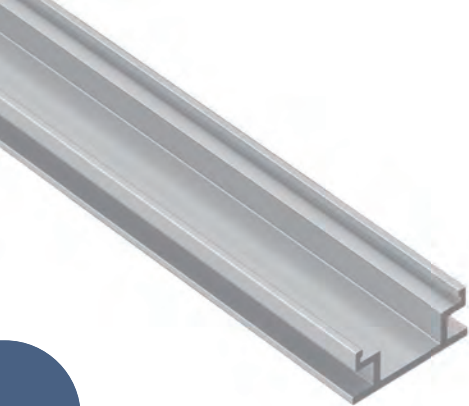

Aluminium Profile



Model 66

Specification:

Suitable for PCB	10mm
Max. LED power:	14.4w/m
Installation:	Floor Recessed
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PC flexible diffuser
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 19.1mm, (H) 8mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 4000mm.	



PC Diffuser
(Opal, light trans. >50%)

Installing accessories:







Plastic Endcap
(with/without hole)




Metal Clip

(Optional)

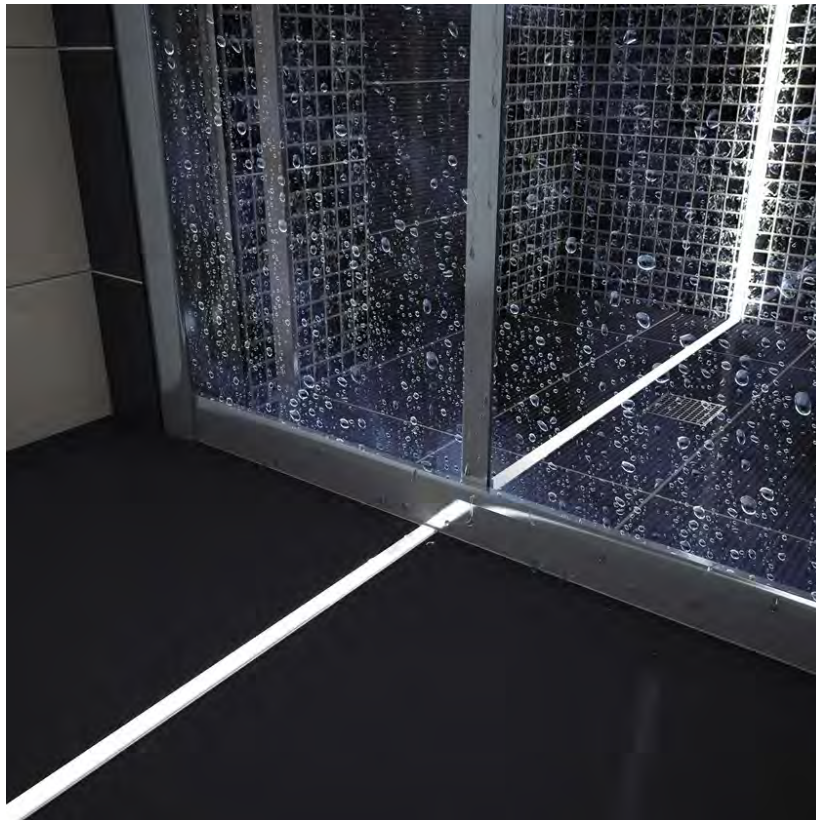

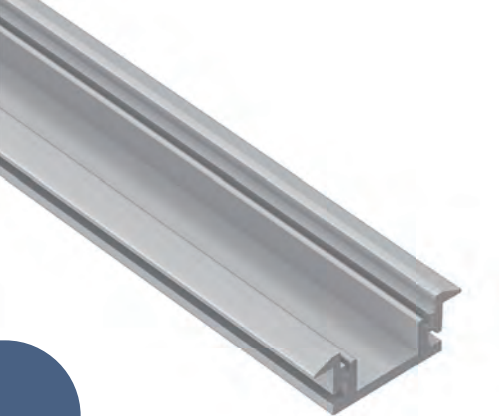

38



Aluminium Profile



Model 38

Specification:

Suitable for PCB	12mm
Max. LED power:	14.4w/m
Installation:	Floor Recessed
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PC flexible diffuser
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 28.6mm, (H) 11.2mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 4000mm.	



PC Diffuser
(Opal, light trans. >50%)

Installing accessories:





Plastic Endcap
(with/without hole)



(Optional)

Metal Clip





Aluminium Profile



Model 35

Specification:

Suitable for PCB	12mm
Max. LED power:	19.2w/m
Installation:	Inground Recessed
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PC flexible diffuser
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 26mm, (H) 25mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 6000mm.	



PC Diffuser
(Opal, light trans. >45%)

Installing accessories:




Plastic Endcap
(with/without hole)



(Optional)

Metal Clip






Aluminium Profile



Model 63



63



Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Inground Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 30.5mm, (H) 30mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.



PC Diffuser
(Opal, light trans. >45%)

Installing accessories:



Aluminium Endcap
(with/without hole)



Soft Endcap



(Optional)

Waterproof Cable Grommet



(Optional)

Metal Clip



(Optional)


IP68 Waterproof Connector



(Optional)

IP68 Waterproof Box




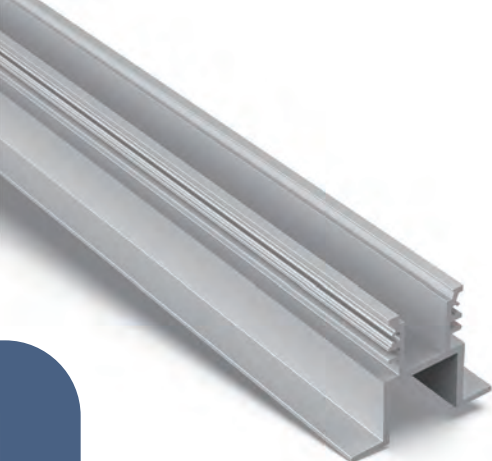

Aluminium Profile



Model 64



Specification:

Suitable for PCB 15 mm

Max. LED power: 19.2w/m

Installation: Inground Recessed

Material: Extruded Aluminium 6063 + Stainless steel 304

Finish: Silver anodised *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 69mm, (H) 65mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.



PC Diffuser
(Opal, light trans. >45%)

Installing accessories:



Aluminium Endcap
(without hole)



Soft Endcap



Stainless steel side bar



Glass Diffuser



(Optional)

Waterproof Cable Grommet




(Optional)

IP68 Waterproof Box




(Optional)

IP68 Waterproof Connector




Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	<i>STEP AND STAIR</i>
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED




25
Page 89



60
Page 91




61
Page 93

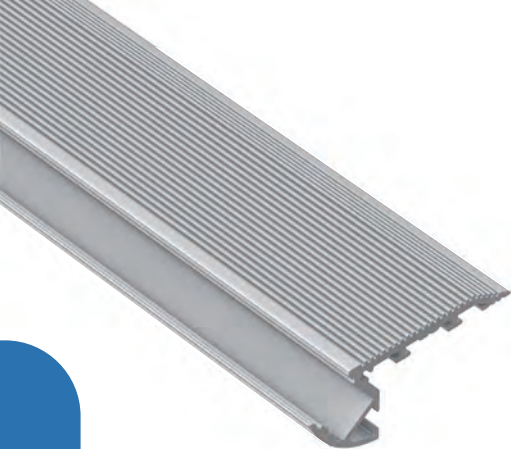

Aluminium Profile



Model 25



25



Specification:

Suitable for PCB 12mm

Max. LED power: 19.2w/m

Installation: Step and Stair

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black anodised *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 67.5mm, (H) 27.8mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser

(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)

PC Diffuser


(Opal, light trans. >50%)


Black Diffuser (Black, light trans. >22%)

Installing accessories:



Plastic Endcap
(with/without hole)

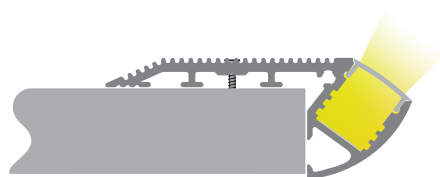



40°




60

Aluminium Profile



Model 60

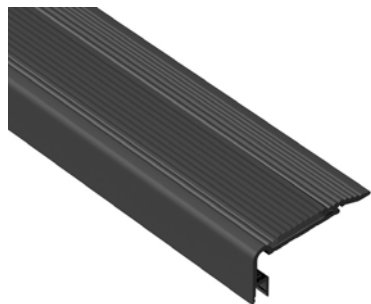

Specification:

Suitable for PCB 5mm

Max. LED power: 9.6w/m

Installation: Step and Stair

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black anodised *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 60mm, (H) 27.5mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >52%)

(Milky, light trans. >65%)

(Frost, light trans. >81%)

(Clear, light trans. >95%)

PC Diffuser

(Opal, light trans. >50%)


Installing accessories:



Plastic Endcap
(without hole)



Anti-slip rubber






Aluminium Profile



Model 61



61



Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Step and Stair

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black anodised *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 82.4mm, (H) 37.9mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser

(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)

PC Diffuser

(Opal, light trans. >50%)

Installing accessories:




Plastic Endcap
(without hole)



Anti-slip rubber (25mm)





Anti-slip rubber

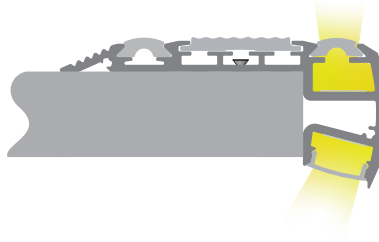


Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED

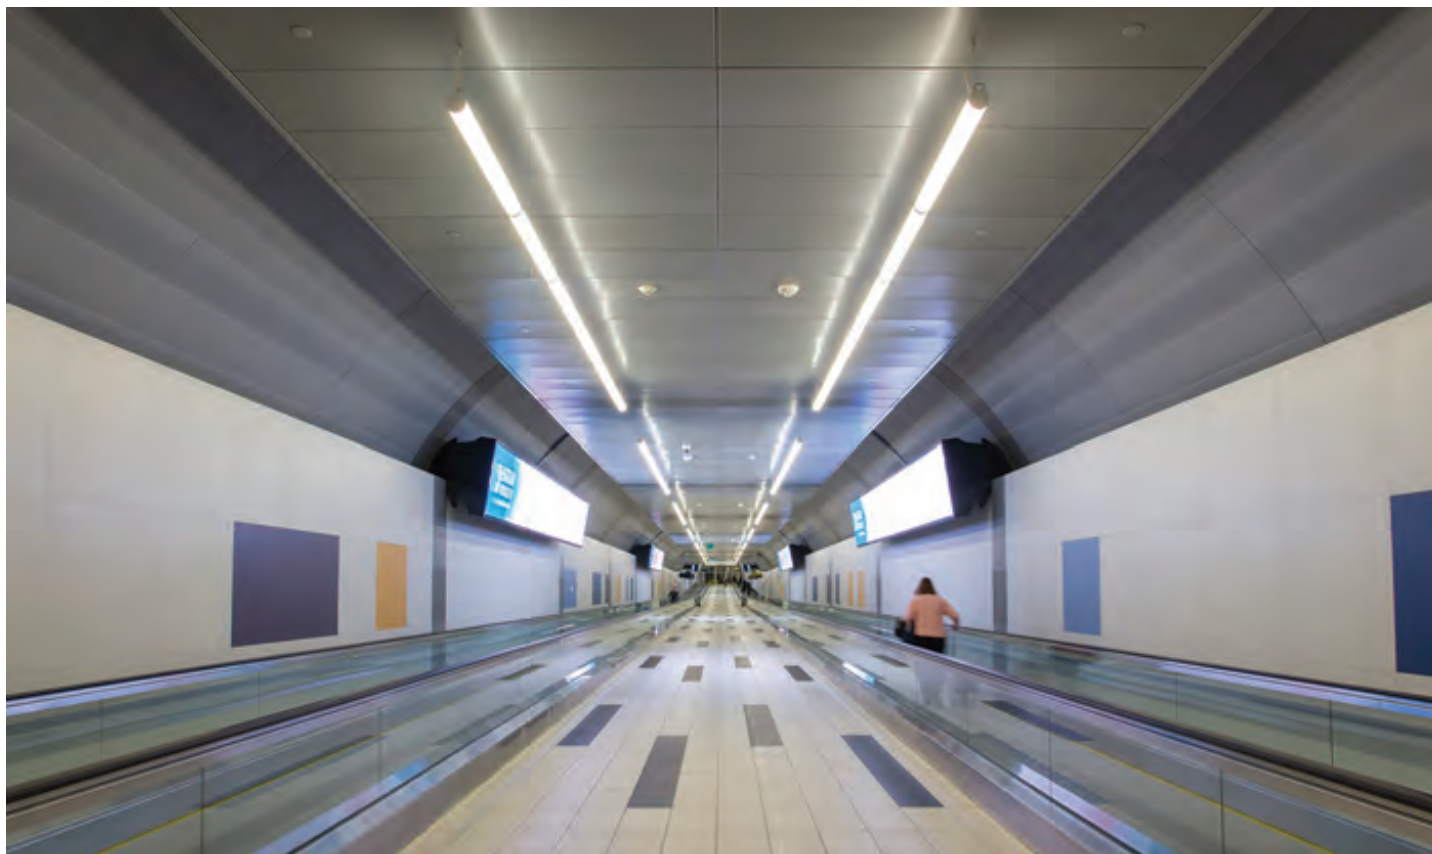


65
Page 97



37
Page 99



53
Page 101



65



Specification:

Suitable for PCB 18mm

Max. LED power: 28.8w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 30mm, (H) 30mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.

Aluminium Profile



Model 65



PC Diffuser
(Opal, light trans. >50%)


Installing accessories:




Plastic Endcap
(with/without hole)



Suspension Kits

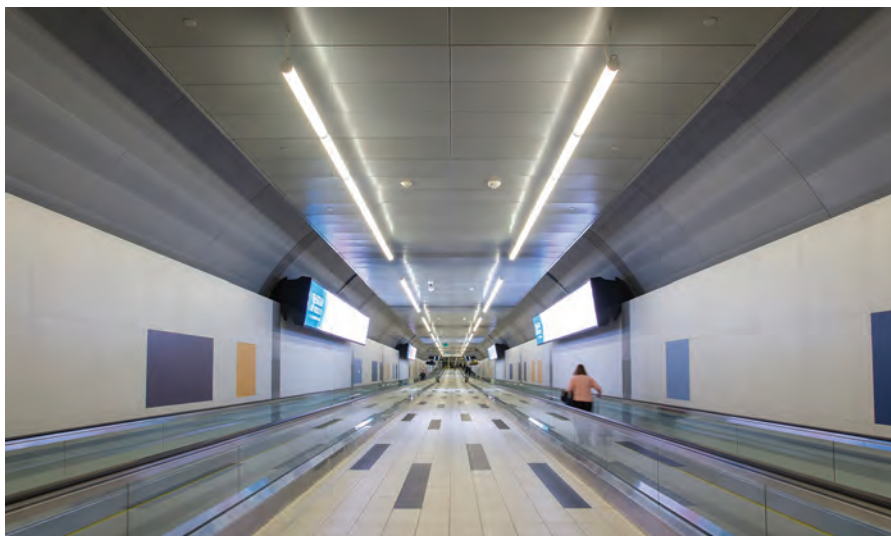



37



90°

Specification:

Suitable for PCB 24mm

Max. LED power: 28.8w/m

Installation: Wardrobe hanging /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 34mm, (H) 34mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 5000mm.

Aluminium Profile



Model 37



PC Diffuser
(Opal, light trans. >50%)

Installing accessories:



Aluminium Endcap
(with/without hole)




Wall Bracket



(Optional)

Supporter






Aluminium Profile



Model 53



Specification:

Suitable for PCB 30mm

Max. LED power: 28.8w/m

Installation: Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 60mm, (H) 60mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PC Diffuser
(Opal, light trans. >50%)

Installing accessories:




Plastic Endcap
(without hole)



Aluminium Endcap
(without hole)




Suspension Kits




Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED




23
Page 105




94
Page 107




92
Page 109




93
Page 111



90
Page 113




58
Page 115

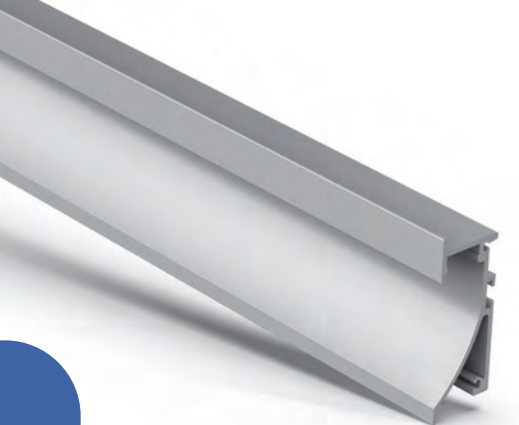

Aluminium Profile



Model 23



23



Specification:

Suitable for PCB 12mm

Max. LED power: 19.2w/m

Installation: Wall flush

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 25.4mm, (H) 60mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)

PC Diffuser

(Opal, light trans. >52%)

Installing accessories:



Aluminium Endcap
(with/without hole)






(Optional)

Metal Clip




Spring Clip




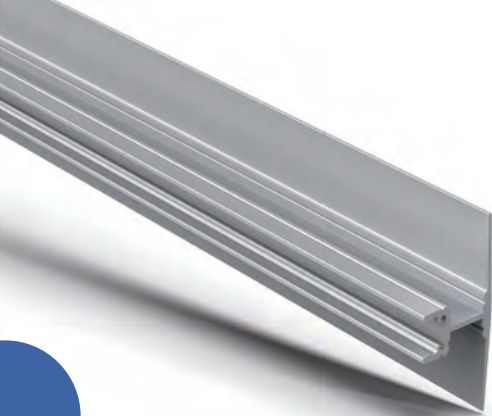

Aluminium Profile

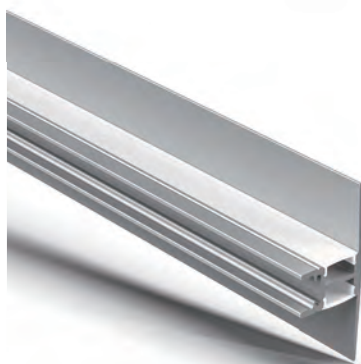

Model 94



94



Specification:

Suitable for PCB 12mm

Max. LED power: 14.4w/m

Installation: Wall Surface mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 27.7mm, (H) 70mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)

PC Diffuser

(Opal, light trans. >52%)



Installing accessories:




Aluminium Endcap
(without hole)



Metal Clip





92



Aluminium Profile



Model 92

Specification:

Suitable for PCB 12mm

Max. LED power: 14.4w/m

Installation: Wall Surface mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 23.6mm, (H) 83mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



PMMA Diffuser

(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)


PC Diffuser


(Opal, light trans. >52%)

Installing accessories:



Aluminium Endcap
(without hole)

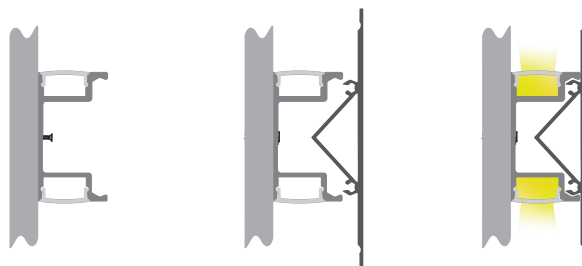


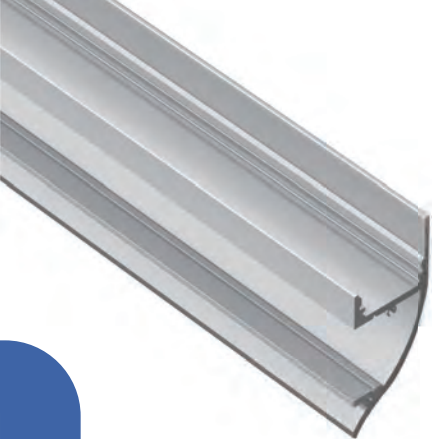

Aluminium Profile



Model 93



93



Specification:

Suitable for PCB 12mm

Max. LED power: 19.2w/m

Installation: Wall Surface mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 17.5mm, (H) 40.7mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



PC Diffuser
(Opal, light trans. >52%)

Installing accessories:







Plastic
(without hole)

Endcap



Metal Clip

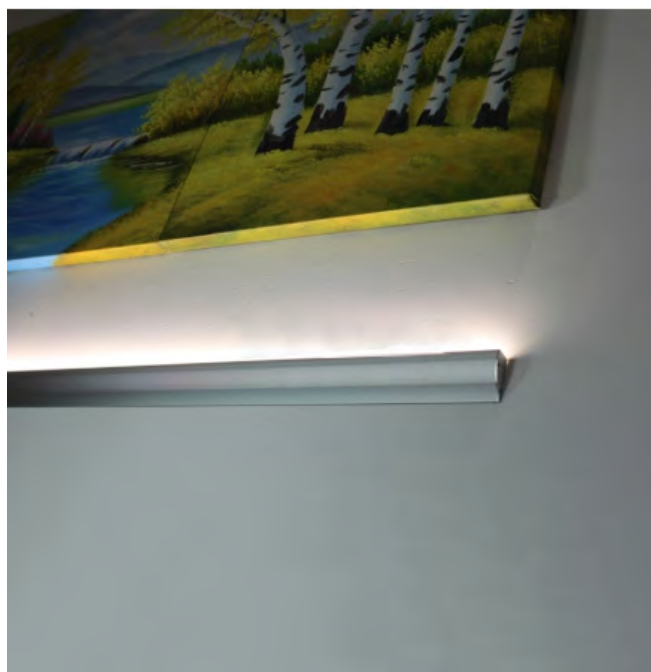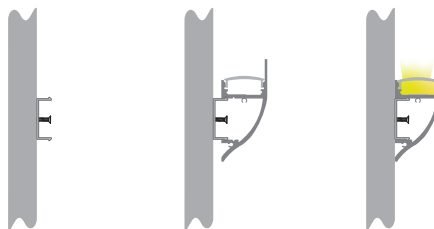

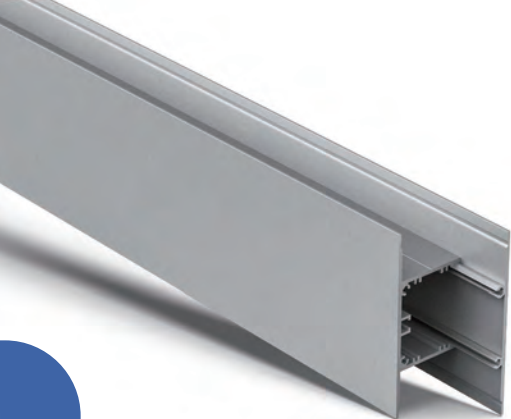

Aluminium Profile



Model 90

Specification:

Suitable for PCB 30mm

Max. LED power: 19.2w/m

Installation: Wall Surface mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 35mm, (H) 83mm

Driver installation: Remote or integral driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >63%)

(New opal, light trans. >74%)

(Frost, light trans. >89%)

(Clear, light trans. >95%)


Installing accessories:





Aluminium Endcap
(without hole)



Suspension Kits

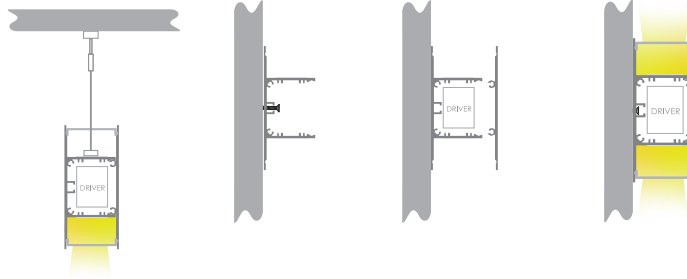

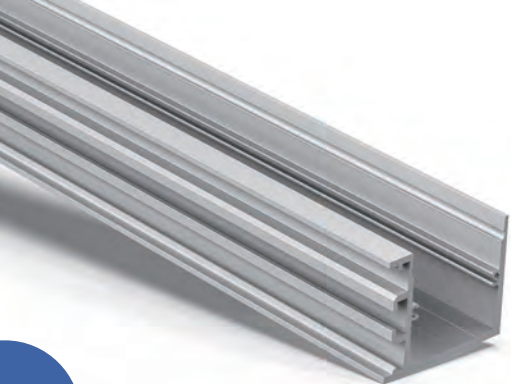

50°



58

Aluminium Profile



Model 58

Specification:

Suitable for PCB 30mm

Max. LED power: 38.4w/m

Installation: Wall Surface mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 42mm, (H) 35mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser





(Opal, light trans. >63%)



(New opal, light trans. >74%)

(Frost, light trans. >89%)

(Clear, light trans. >95%)

Installing accessories:



	Metal Clip		Joiners 180°A
	Screwless Endcap (with hole)		Joiners 90°B
	Joiners 90°A		Joiners 120°B
	Joiners 120°A		

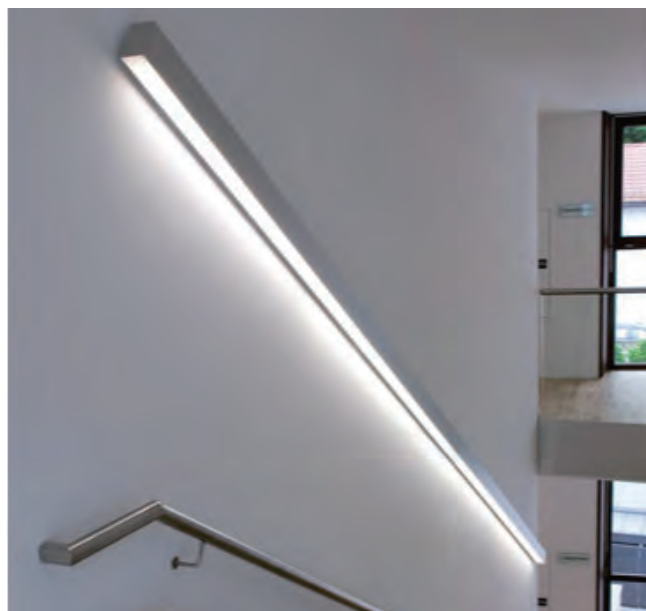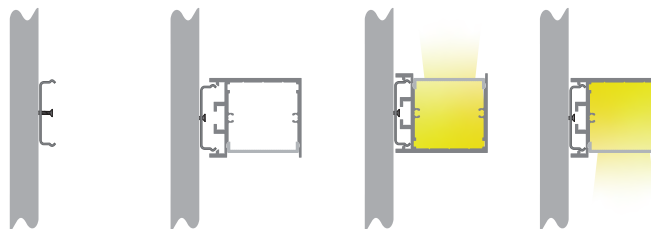


Catalogue

1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	<i>DRIVER BUILT-IN PROFILE</i>	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED


DRIVER BUILT-IN PROFILE

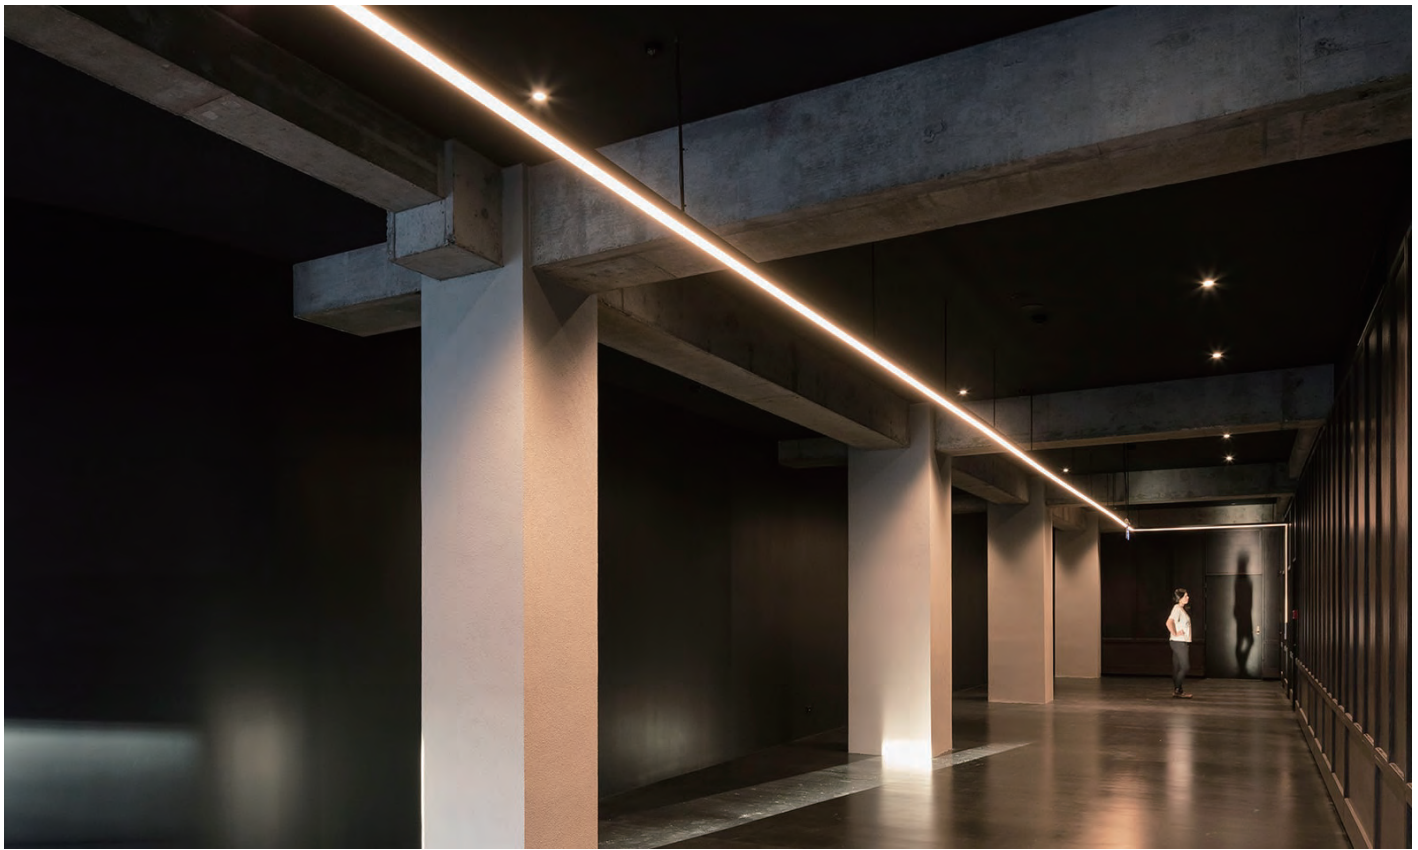


71F
Page 119




71S
Page 1119




71SH
Page 119




76
Page 121




57
Page 123




75
Page 125




74HD
Page 127




77
Page 129



71F



71S



71SH



Specification:

Suitable for PCB 30mm

Max. LED power: 38.4w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 35mm, (H) 68mm

Driver installation: Remote or integral driver required


* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.


Aluminium Profile



Model 71F

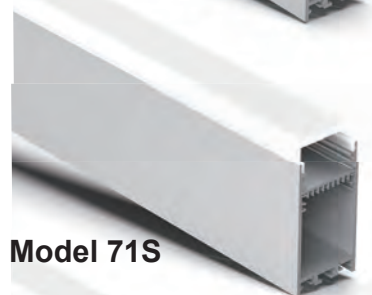

Model 71S

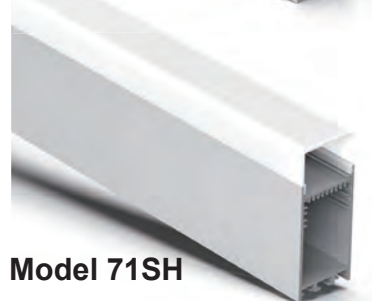

Model 71SH



PMMA Diffuser

(Opal, light trans. >63%)
(New opal, light trans. >74%)
(Frost, light trans. >89%)
(Clear, light trans. >95%)



Black Diffuser

(Black, light trans. > 22%)



PMMA Diffuser

(Opal, light trans. >60%)






PMMA Diffuser

(Opal, light trans. >60%)

Installing accessories:

	Aluminium Endcap (without hole)		Suspension Kits
	Aluminium Endcap (without hole)		Wall Clips
	Aluminium Endcap (without hole)		Joiners 90°A
	Joiners 180°A		CNC Aluminum Cap (without hole)
	Dali & Push Dimmable LED Driver 30/36/60/100W		Metal Clip
	Standard IP67 Led Powersupply 20/30/36/45/60W		Joiners 120°A

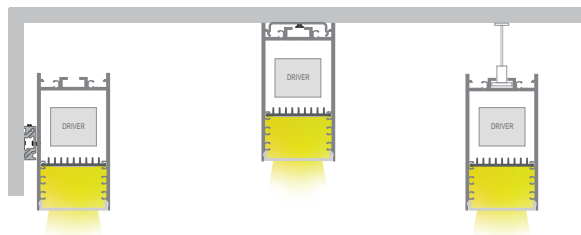

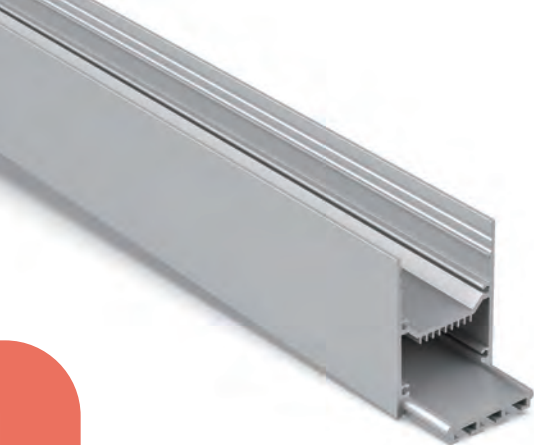

Specification:

Suitable for PCB 25mm

Max. LED power: 38.4w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 46mm, (H) 68.5mm

Driver installation: Remote or integral driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile










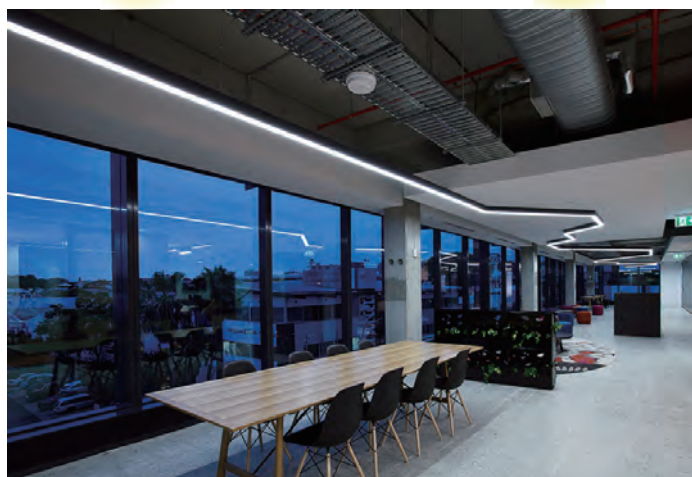
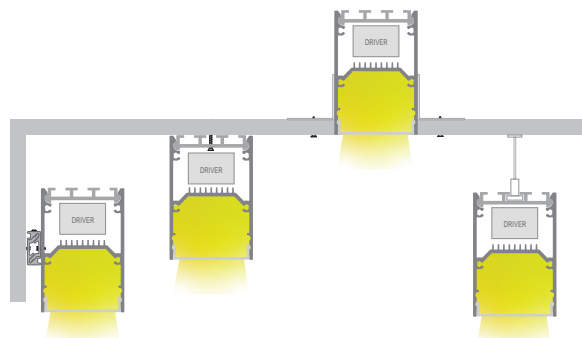
Model 76



PMMA Diffuser
(Opal, light trans. >60%)

Installing accessories:

	Aluminium Endcap (without hole)		Suspension Kits
 (Optional)	CNC Aluminum Cap (without hole)	 (Optional)	Wall Clips
 (Optional)	Joiners 180°A	 (Optional)	Joiners 90°A
 (Optional)	Dali & Push Dimmable LED Driver 30/36/60W	 (Optional)	Joiners 120°A
 (Optional)	Standard IP67 Led Powersupply 20/30/36/45/60W		








Aluminium Profile



Model 57



57



Specification:

Suitable for PCB 18mm

Max. LED power: 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 50mm, (H) 75mm

Driver installation: Remote or integral driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser (Down)

(Opal, light trans. >60%)

(New opal, light trans. >74%)



PMMA Diffuser (Up)

(Opal, light trans. >60%)














(New opal, light trans. >74%)







Black Diffuser

(Black, light trans. > 22%)

Installing accessories:

	Aluminum Screwless Endcap (without hole)		Suspension Kits
	Metal Clip	 (Optional)	Wall Clips
 (Optional)	Stainless Steel L bracket	 (Optional)	Joiners 90°A
 (Optional)	Joiners 90°B	 (Optional)	Joiners 120°A
 (Optional)	Dali & Push Dimmable LED Driver 30/36/60/100W	 (Optional)	Joiners 180°A
 (Optional)	Standard IP67 Led Powersupply 20/30/36/45/60W	 (Optional)	Joiners 120°B
 (Optional)	Gear Tray Clip		

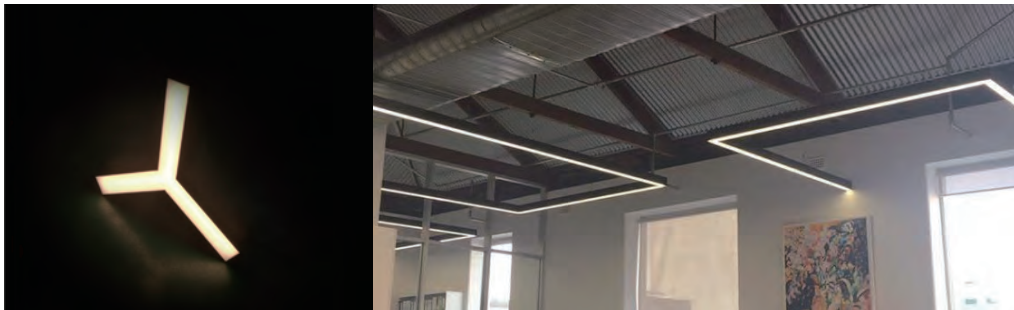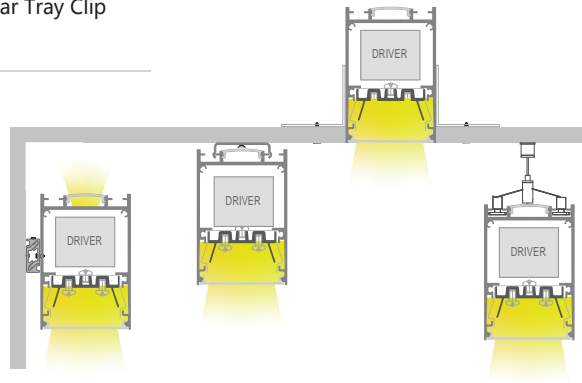

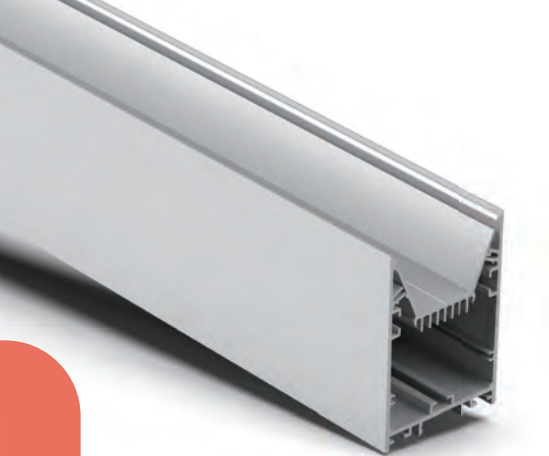

Specification:

Suitable for PCB 28mm

Max. LED power: 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 50mm, (H) 75mm

Driver installation: Remote or integral driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



Model 75



PMMA Diffuser (Down)
(New opal, light trans. >74%)





PMMA Diffuser (Up)
(New opal, light trans. >74%)

(For Zhaga Led PCB board) , hole-free design

Installing accessories:

	Aluminium Endcap (without hole)		Suspension Kits
 (Optional)	CNC Aluminum Cap (without hole)	 (Optional)	Wall Clips
 (Optional)	Joiners 180°A	 (Optional)	Joiners 90°A
 (Optional)	Joiners 90°B	 (Optional)	Joiners 120°A
 (Optional)	Dali & Push Dimmable LED Driver 30/36/60/100W	 (Optional)	Joiners 120°B
 (Optional)	Standard IP67 Led Powersupply 20/30/36/45/60W		

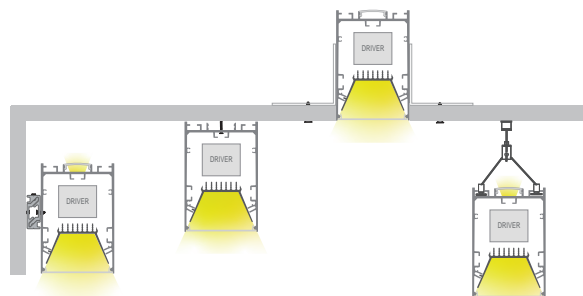



74HD



Aluminium Profile



Model 74HD

Specification:

Suitable for PCB 44mm

Max. LED power: 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 80mm, (H) 100mm

Driver installation: Remote or integral driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser (Down)

(New opal, light trans. >74%)






PMMA Diffuser (Up)

(New opal, light trans. >74%)

Installing accessories:

	Aluminium Endcap (without hole)		Suspension Kits
 (Optional)	Aluminum Screwless Endcap (without hole)	 (Optional)	Wall Clips
 (Optional)	Joiners 90°A	 (Optional)	Joiners 90°B
 (Optional)	Joiners 120°A	 (Optional)	Joiners 120°B
 (Optional)	Dali & Push Dimmable LED Driver 30/36/60/100W	 (Optional)	Joiners 180°A
 (Optional)	Standard IP67 Led Powersupply 20/30/36/45/60W		

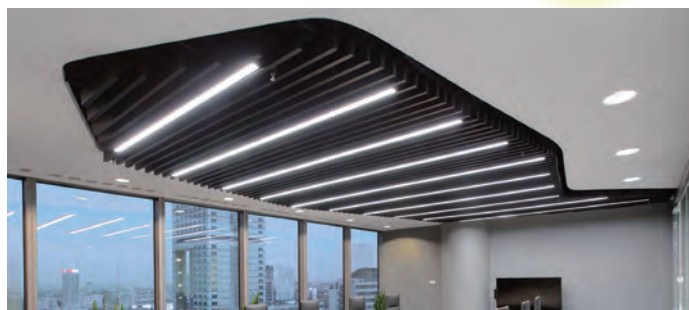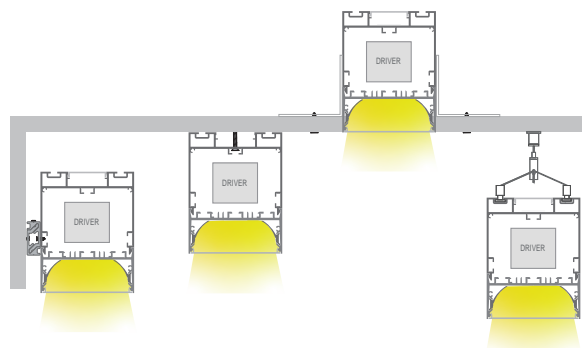



77



Specification:

Suitable for PCB 70mm

Max. LED power: 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 74mm, (H) 77mm

Driver installation: Remote or integral driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile











Model 77




PMMA Diffuser

(New opal, light trans. >77%)


Installing accessories:

	Aluminium Endcap (without hole)		Suspension Kits
 (Optional)	Joiners 90°A	 (Optional)	Wall Clips
 (Optional)	Dali & Push Dimmable LED Driver 30/36/60/100W	 (Optional)	Joiners 180°A
 (Optional)	Standard IP67 Led Powersupply 20/30/36/45/60W	 (Optional)	Joiners 120°A

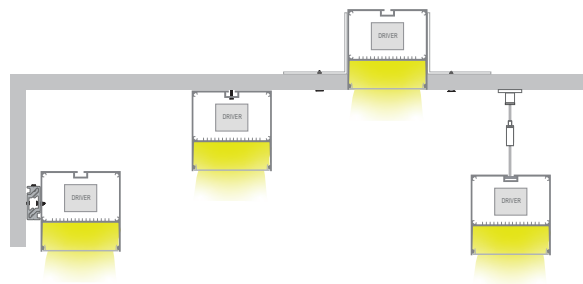


Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED




40
Page 133





41
Page 135



42
Page 137



43
Page 139

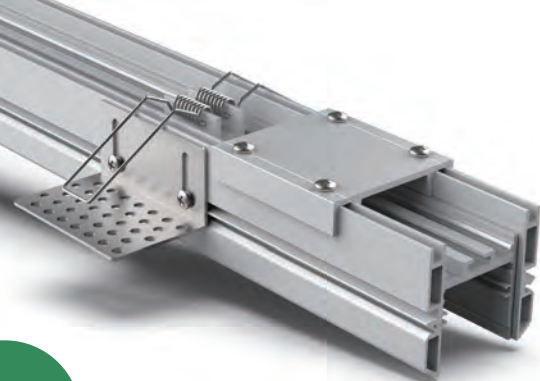

Specification:

Suitable for PCB 30mm

Max. LED power: 28.8w/m

Installation: Ceiling trimless

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **


Size: Profile (W) 54mm, (H) 48mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile

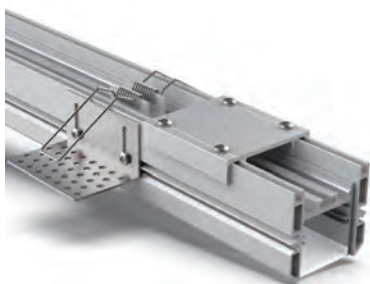

Model 40



PMMA Diffuser

(Opal, light trans. >63%)


(New opal, light trans. >74%)



(Frost, light trans. >89%)

(Clear, light trans. >95%)

Installing accessories:

	Aluminium Endcap (without hole)		Aluminium Endcap (without hole)
	Stainless Steel L bracket		Alum. bridge base
	Spring Clip	 (Optional)	Joiners 180°A
 (Optional)	Joiners 90°A	 (Optional)	Joiners 120°A

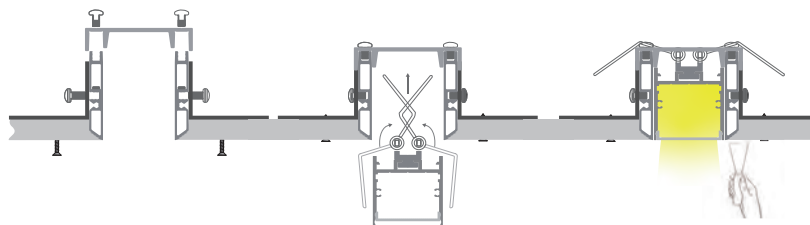

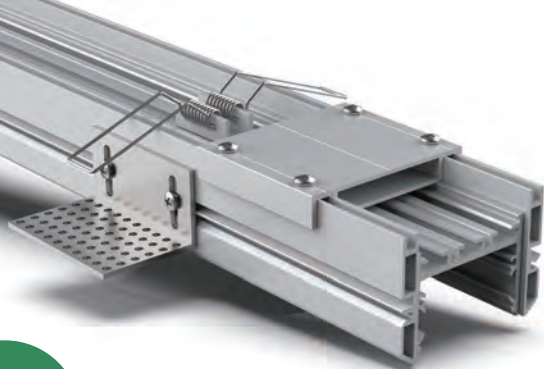

41



Specification:

Suitable for PCB 45mm

Max. LED power: 38.4w/m

Installation: Ceiling trimless

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White*

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous**


Size: Profile (W) 67mm, (H) 48mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile

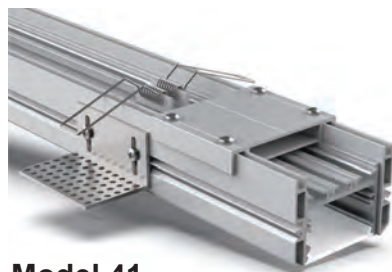

Model 41

PMMA Diffuser

(Opal, light trans. >60%)

(New opal, light trans. >77%)

Installing accessories:



Aluminium Endcap
(without hole)



Aluminum Endcap
(without hole)



Stainless Steel L bracket



Alum. bridge base



Spring Clip



(Optional)

Joiners 180°A



(Optional)

Joiners 90°A




(Optional)



Joiners 180°B



(Optional)

Joiners 120°A

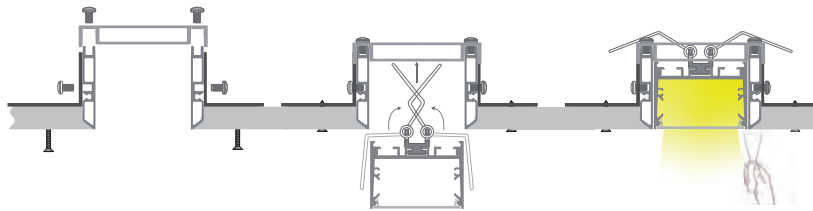

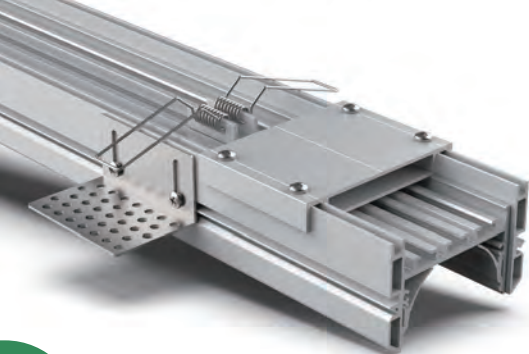

Specification:

Suitable for PCB 55mm

Max. LED power: 57.6w/m

Installation: Ceiling trimless

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 76mm, (H) 48mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



Model 42



PMMA Diffuser
(New opal, light trans. >74%)

Installing accessories:



Aluminium Endcap
(without hole)



Aluminum Endcap
(without hole)



Stainless Steel L bracket



Alum. bridge base



Spring Clip



(Optional)

Joiners 180°A



(Optional)

Joiners 90°A




(Optional)



Joiners 180°B



(Optional)

Joiners 120°A

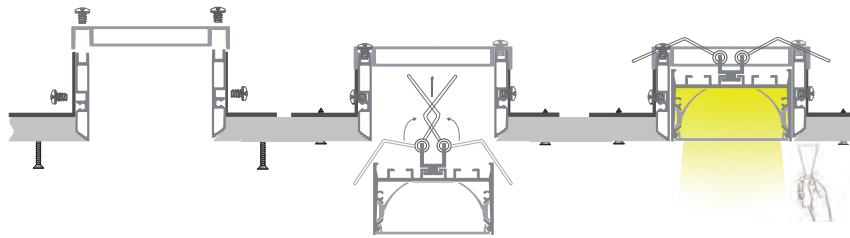

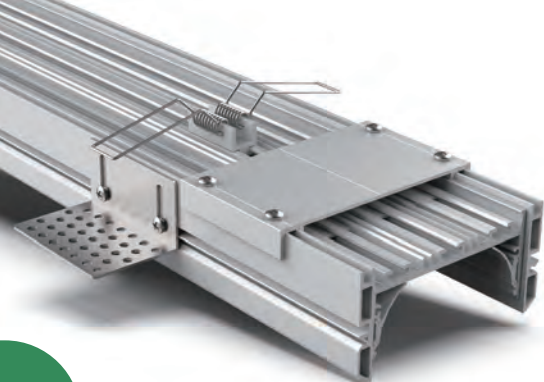

Specification:

Suitable for PCB 75mm

Max. LED power: 57.6w/m

Installation: Ceiling trimless

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **


Size: Profile (W) 96mm, (H) 48mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile

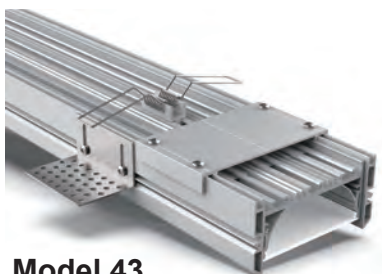

Model 43

PMMA Diffuser
(New opal, light trans. >74%)

Installing accessories:



Aluminium Endcap
(without hole)



Aluminum Endcap
(without hole)



Stainless Steel L bracket



Alum. bridge base



Spring Clip



(Optional)

Joiners 180°A



(Optional)

Joiners 90°A




(Optional)

Joiners 180°B




(Optional)

Joiners 120°A

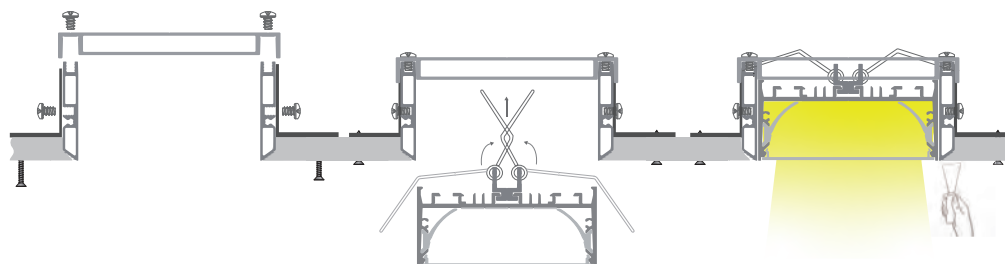


Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	<i>SURFACE & SUSPENSION-ARCHITECTURAL</i>	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED




20
Page 143




70F
Page 145




70S
Page 145




70SH
Page 145




69F
Page 147




69S
Page 147




69SH
Page 147




72F
Page 149




72S
Page 149




73F
Page 151




74F
Page 153




55
Page 155



73S
Page 151



74S
Page 153




79
Page 157



Aluminium Profile



Model 20



Specification:

Suitable for PCB	24mm
Max. LED power:	38.4*2w/m
Installation:	Surface /Suspended
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 25mm, (H) 120mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 4000mm.	



PMMA Diffuser
(Opal, light trans. >55%)

Installing accessories:



Screwless aluminum Cap
(without hole)



Suspension Kits



(Optional)

Wall Clips



(Optional)

Joiners 90°A




(Optional)

Joiners 180°A




(Optional)

Joiners 120°A

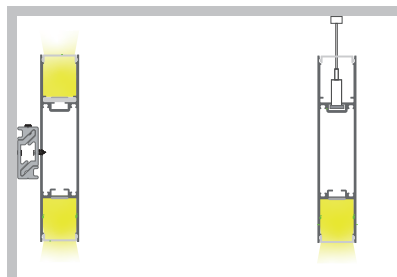



Aluminium Profile




Model 70F




Model 70S




Model 70SH



70F



70S



70SH



60°



Specification:

Suitable for PCB 20mm / 30mm / 30mm

Max. LED power: 38.4w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 35mm, (H) 37.5mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >63%)
(New opal, light trans. >74%)
(Frost, light trans. >89%)
(Clear, light trans. >95%)



Black Diffuser

(Black, light trans. > 22%)



PMMA Diffuser












(Opal, light trans. >60%)





PMMA Diffuser

(Opal, light trans. >60%)


Installing accessories:

	Aluminium Endcap (with/without hole)		Suspension Kits
	Aluminium Endcap (without hole)		Wall Clips (Optional)
	Aluminium Endcap (without hole)		Aluminium diffuser (Optional)
	Aluminum Screwless Endcap (with/without hole) (Optional)		Joiners 90°A (Optional)
	Joiners 120°A (Optional)		Joiners 180°A (Optional)
	Metal Clip (Optional)		

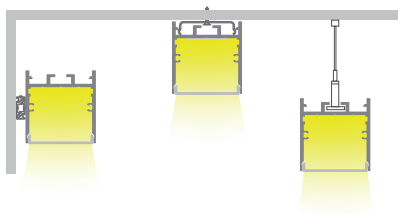





69F



69S



69SH



90°

Aluminium Profile



Model 69F



Model 69S



Model 69SH

Specification:

Suitable for PCB 30mm / 25mm / 25mm

Max. LED power: 38.4w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 35mm, (H) 25.4mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >63%)

(New opal, light trans. >74%)

(Frost, light trans. >89%)

(Clear, light trans. >95%)



PMMA Diffuser







(Opal, light trans. >63%)




PMMA Diffuser

(Opal, light trans. >60%)


Installing accessories:

	Aluminium Endcap (with/without hole)		Suspension Kits
	Aluminium Endcap (without hole)	 (Optional)	Metal Clip
	Aluminium Endcap (without hole)	 (Optional)	Joiners 90°A
 (Optional)	Joiners 120°A	 (Optional)	Joiners 180°A

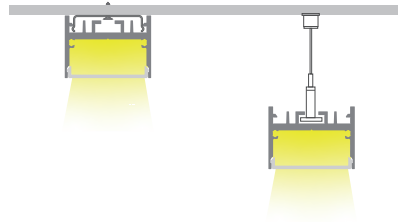




Aluminium Profile

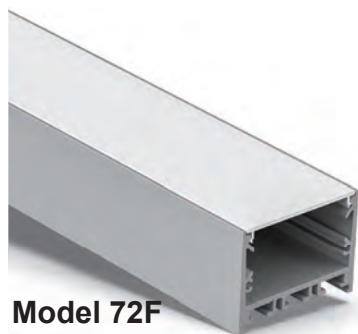


Model 72F



Model 72S



72F



72S



Specification:

Suitable for PCB 40mm / 30mm

Max. LED power: 38.4w/m / 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 50mm, (H) 37.5mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >60%)

(New opal, light trans. >74%)



Black Diffuser

(Black, light trans. > 22%)



PMMA Diffuser

(Opal, light trans. >60%)

Installing accessories:



Aluminium Endcap
(with/without hole)



Suspension Kits



Aluminium Endcap
(with/without hole)



Wall Clips



(Optional)

Screwless aluminum Cap
(with/without hole)



(Optional)

Aluminium diffuser



(Optional)

Joiners 90°A



(Optional)

Joiners 180°B




(Optional)

Joiners 120°A



(Optional)

Joiners 180°A

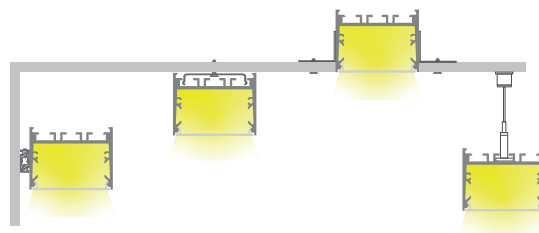




Aluminium Profile




Model 73F



Model 73S



73F



73S



Specification:

Suitable for PCB 25mm / 45mm

Max. LED power: 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 60mm, (H) 37.5mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.
















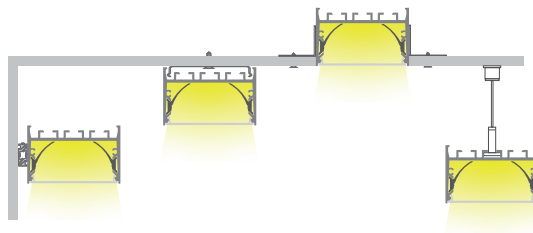
PMMA Diffuser
(New opal, light trans. >74%)




PMMA Diffuser
(Opal, light trans. >60%)


Installing accessories:

	Aluminium Endcap (with/without hole)		Suspension Kits
	Aluminium Endcap (with/without hole)	 (Optional)	Screwless aluminum Cap (with/without hole)
 (Optional)	Wall Clips	 (Optional)	Screwless aluminum Cap (with/without hole)
 (Optional)	Joiners 90°A	 (Optional)	Joiners 90°B
 (Optional)	Joiners 120°A	 (Optional)	Joiners 120°B
 (Optional)	Joiners 180°B	 (Optional)	Aluminium diffuser
 (Optional)	Joiners 180°A		





74F



74S



110°

Specification:

Suitable for PCB 45mm / 25mm

Max. LED power: 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 80mm, (H) 37.5mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



Model 74F



Model 74S



PMMA Diffuser














(New opal, light trans. >74%)






PMMA Diffuser

(Opal, light trans. >60%)

Installing accessories:

	Aluminium Endcap (with/without hole)		Suspension Kits
	Aluminium Endcap (with/without hole)	 (Optional)	Screwless aluminum Cap (with/without hole)
 (Optional)	Aluminium diffuser	 (Optional)	Screwless aluminum Cap (with/without hole)
 (Optional)	Wall Clips	 (Optional)	Joiners 90°B
 (Optional)	Joiners 90°A	 (Optional)	Joiners 120°B
 (Optional)	Joiners 120°A	 (Optional)	Joiners 180°A
 (Optional)	Joiners 180°B		

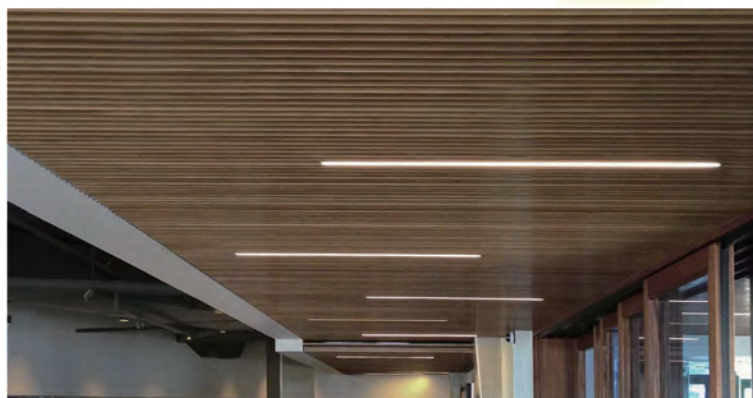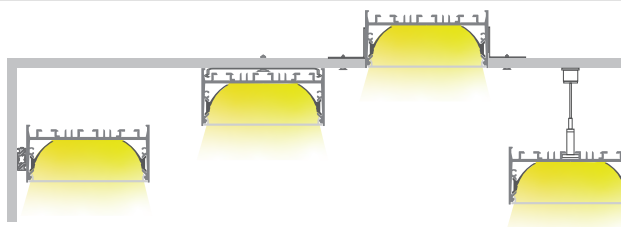



Aluminium Profile



Model 55

Specification:

Suitable for PCB	40mm
Max. LED power:	57.6w/m
Installation:	Surface /Suspended
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PC flexible diffuser
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 102mm, (H) 31mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 4000mm.	



PC Diffuser
(Opal, light trans. >55%)


Installing accessories:




Aluminium Endcap
(without hole)



Suspension Kits

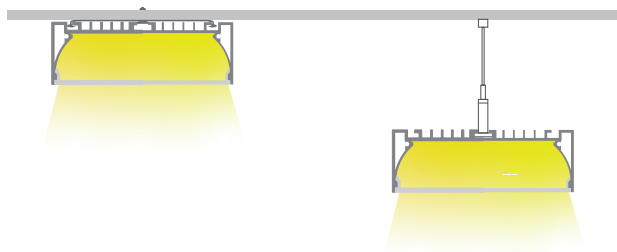


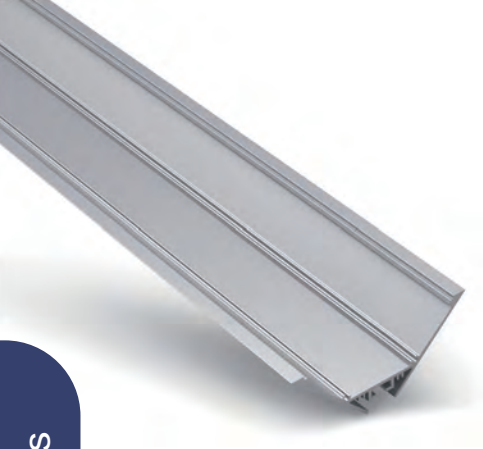

Aluminium Profile



Model 79



79



115°

Specification:

Suitable for PCB 80mm

Max. LED power: 57.6w/m

Installation: Corner Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 90mm, (H) 37.5mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(New opal, light trans. >74%)


Installing accessories:



Aluminium Endcap
(without hole)




Suspension Kits




Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED




24
Page 161




72R
Page 163




49
Page 167




73R
Page 165



50
Page 169



51
Page 171



24



Aluminium Profile



Model 24

Specification:

Suitable for PCB 30mm

Max. LED power: 38.4w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 49mm, (H) 37.5mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

(Opal, light trans. >63%)

(New opal, light trans. >74%)

(Frost, light trans. >89%)

(Clear, light trans. >95%)

Black Diffuser

(Black, light trans. >22%)

Installing accessories:



Aluminium Endcap
(with/without hole)



Spring Clip



(Optional)

Joiners 180°A




(Optional)


Joiners 90°A



(Optional)

Joiners 120°A

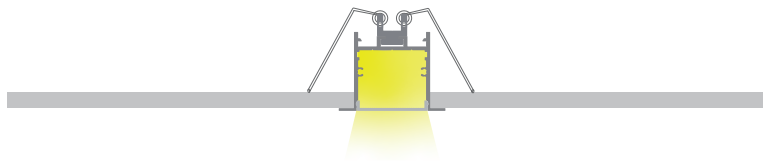



72R



Specification:

Suitable for PCB 45mm

Max. LED power: 57.6w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 63.9mm, (H) 45mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 5000mm.

Aluminium Profile



Model 72R




PMMA Diffuser

(Opal, light trans. >60%)

(New opal, light trans. >74%)

Installing accessories:



Aluminium Endcap
(with/without hole)



Spring Clip





Joiners 90°A




Joiners 180°A



Joiners 120°A

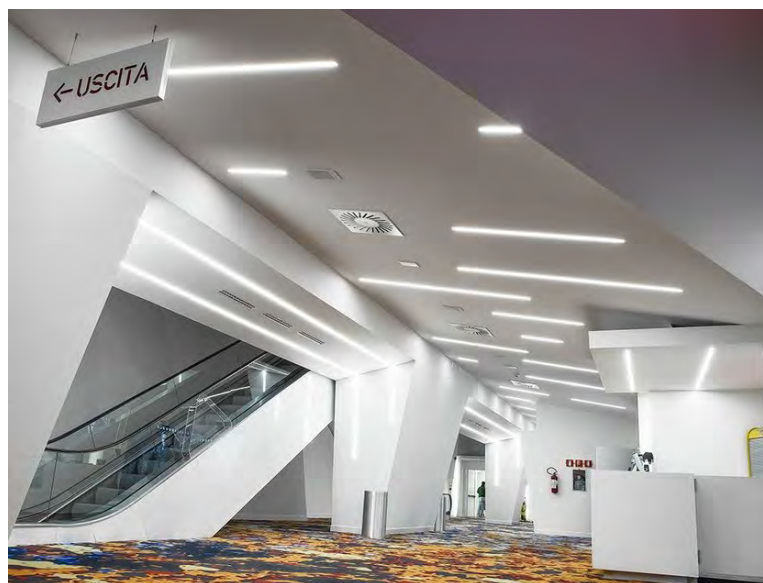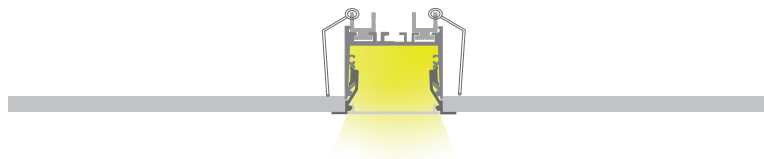



73R



Specification:

Suitable for PCB	38mm
Max. LED power:	57.6w/m
Installation:	Recessed
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 73.9mm, (H) 45mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 5000mm.	

Aluminium Profile



Model 73R



PMMA Diffuser
(New opal, light trans. >74%)

Installing accessories:



Aluminium Endcap
(with/without hole)



Spring Clip



Joiners 90°A



Joiners 90°B




Joiners 120°A




Joiners 180°A



Joiners 120°B

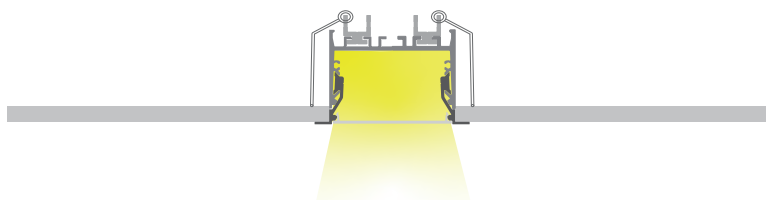



49



Specification:

Suitable for PCB 50mm

Max. LED power: 38.4w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 80mm, (H) 25mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



Model 49



PMMA Diffuser

(Opal, light trans. >60%)

(New opal, light trans. >74%)

Installing accessories:



Aluminium Endcap
(with/without hole)



Spring Clip




Joiners 90°A




Joiners 180°A



Joiners 120°A





50



Specification:

Suitable for PCB 55mm

Max. LED power: 57.6w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 91mm, (H) 35mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



Model 50



PC Diffuser
(Opal, light trans. >55%)


Installing accessories:




Aluminium Endcap
(without hole)



Spring Clip

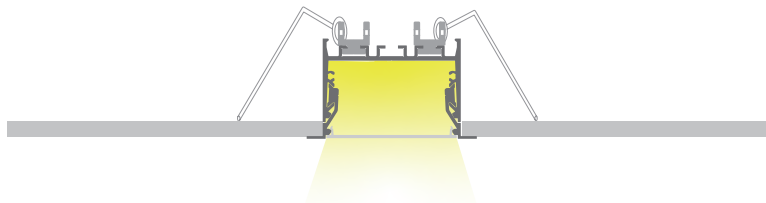



51



Specification:

Suitable for PCB 14mm

Max. LED power: 19.2w/m

Installation: Wall flush

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **


Size: Profile (W) 19.5mm, (H) 50mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile

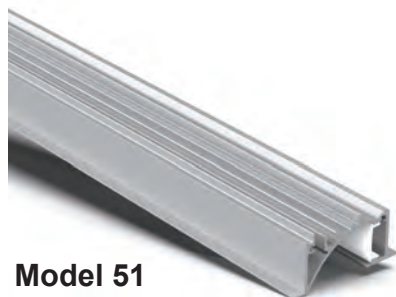

Model 51



PMMA Diffuser

(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)

PC Diffuser

(Opal, light trans. >52%)


Installing accessories:



Aluminium Endcap
(without hole)




Spring Clip




Catalogue

1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED




83

Page 175




84

Page 177




85

Page 179




86

Page 181




87

Page 183




88

Page 185





89

Page 187



78

Page 189

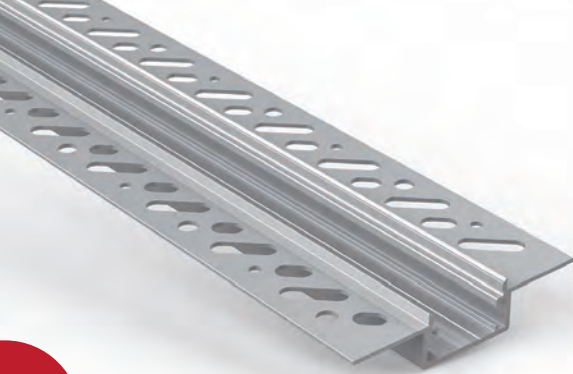

83



Specification:

Suitable for PCB	16mm
Max. LED power:	19.2w/m
Installation:	Plaster in Trimless
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 66.4mm, (H) 16.4mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 2500mm.	

Aluminium Profile









Model 83





PMMA Diffuser
(Opal, light trans. >52%)

Installing accessories:

	Plastic Endcap (with/without hole)		Joiners 90°B
	Joiners 90°A		Joiners 120°B
	Joiners 120°A		Joiners 180°A



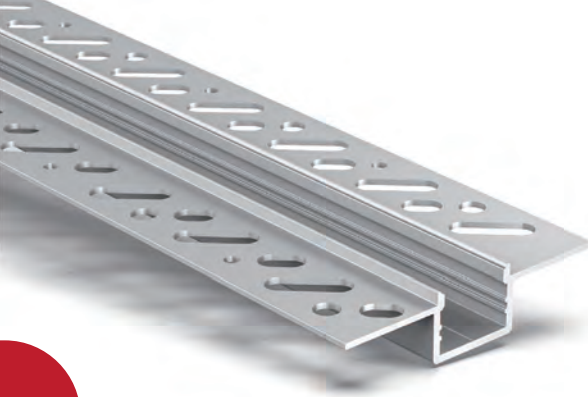

84



Aluminium Profile



Model 84

Specification:

Suitable for PCB 16mm

Max. LED power: 19.2w/m

Installation: Plaster in Trimless

Material: Extruded Aluminium 6063

Finish: Silver anodised *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 59mm, (H) 13.6mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.



PMMA Diffuser
(Opal, light trans. >52%)




Black Diffuser
(Black, light trans. >22%)

Installing accessories:



Plastic Endcap
(with/without hole)





85



Specification:

Suitable for PCB 16mm

Max. LED power: 19.2w/m

Installation: Plaster in Trimless

Material: Extruded Aluminium 6063

Finish: Silver anodised *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 38.8mm, (H) 13.6mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.

Aluminium Profile



Model 85







PMMA Diffuser
(Opal, light trans. >52%)

Installing accessories:



Plastic Endcap
(with/without hole)

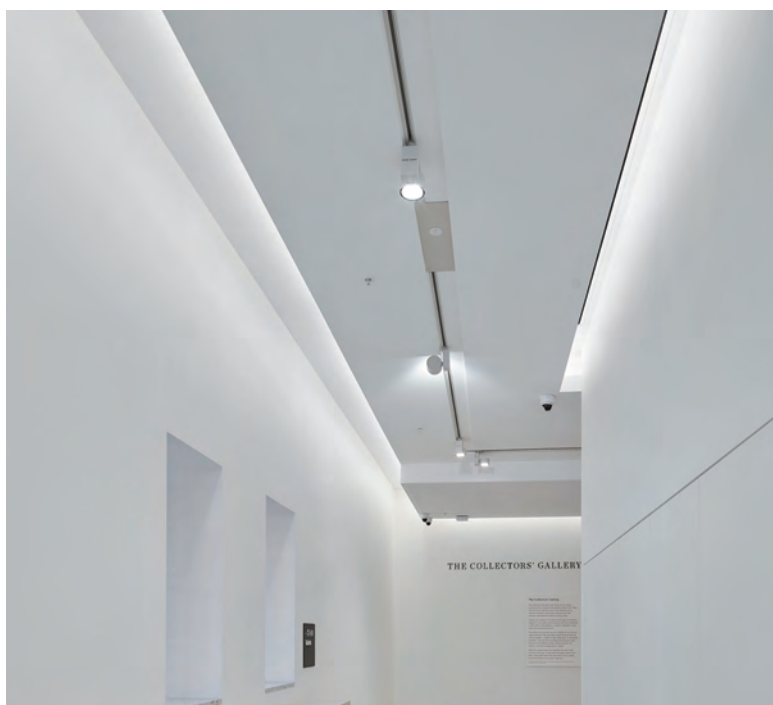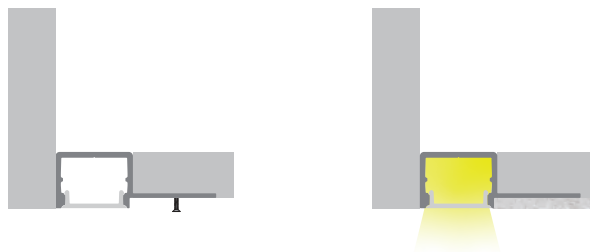

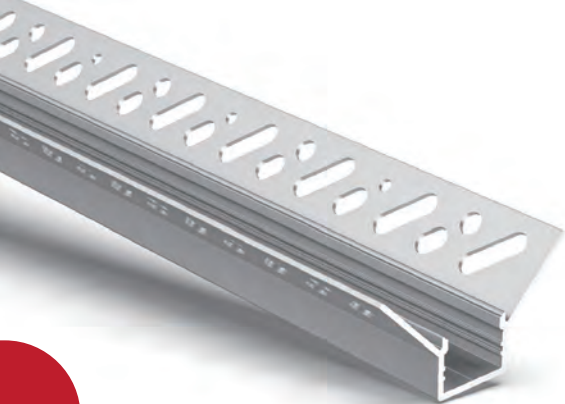

86



Specification:

Suitable for PCB 16mm

Max. LED power: 19.2w/m

Installation: Plaster in Trimless, Inside corner

Material: Extruded Aluminium 6063

Finish: Silver anodised *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 49.8mm, (H) 26.1mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.

Aluminium Profile



Model 86



PMMA Diffuser
(Opal, light trans. >52%)







Black Diffuser
(Black, light trans. >22%)

Installing accessories:



Plastic Endcap
(with/without hole)

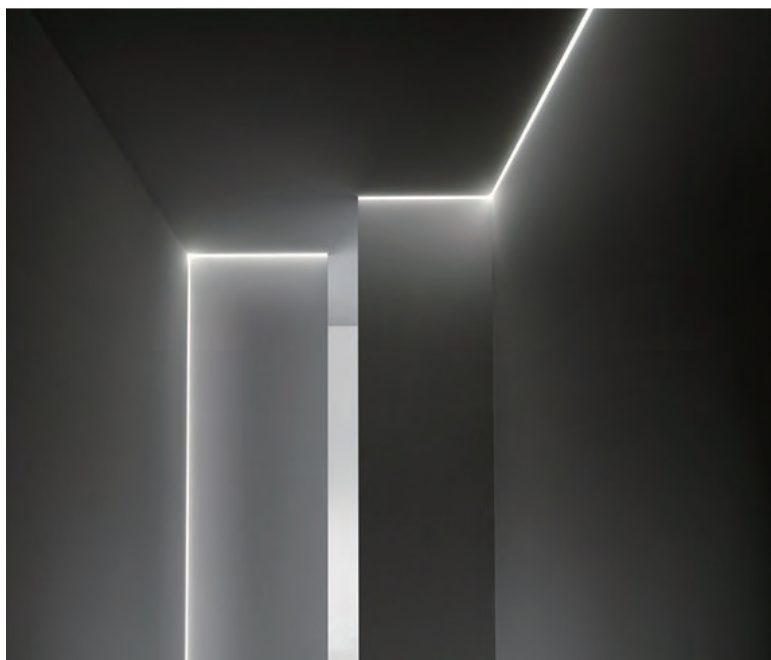



87



Specification:

Suitable for PCB 16mm

Max. LED power: 19.2w/m

Installation: Plaster in Trimless, Outside corner

Material: Extruded Aluminium 6063

Finish: Silver anodised *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 56.6mm, (H) 23.7mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.

Aluminium Profile



Model 87



PMMA Diffuser
(Opal, light trans. >52%)








Black Diffuser
(Black, light trans. >22%)

Installing accessories:



Plastic Endcap
(with/without hole)

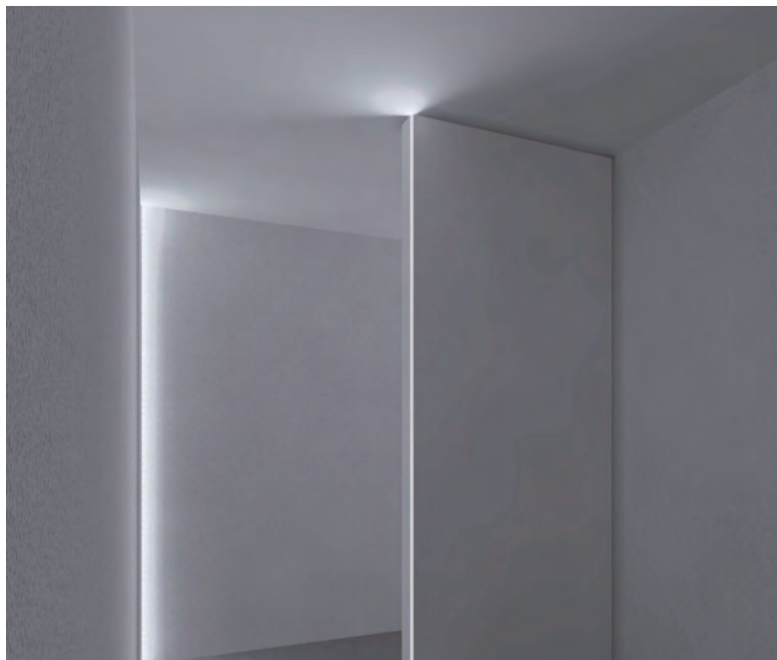



Specification:

Suitable for PCB 10mm	
Max. LED power:	19.2w/m
Installation:	Plaster in Trimless
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 42.5mm, (H) 28.5mm
Driver installation: Remote driver required	
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 2500mm.	

Aluminium Profile





Model 88



PMMA Diffuser
(Opal, light trans. >52%)

PLASTER IN TRIMLESS

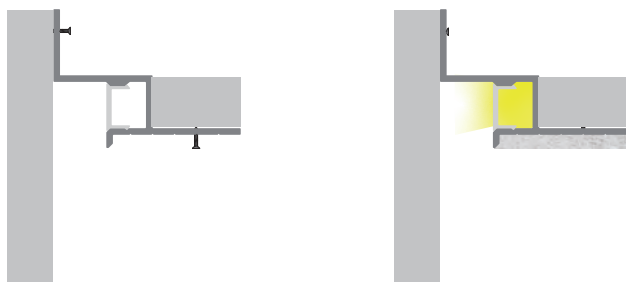



89



Aluminium Profile



Model 89

Specification:

Suitable for PCB 5mm

Max. LED power: 9.6w/m

Installation: Plaster in Trimless

Material: Extruded Aluminium 6063

Finish: Silver anodised *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 28mm, (H) 9mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.



PC Diffuser

(Opal, light trans. >50%)


(Clear, light trans. >94%)

Installing accessories:



Plastic Endcap
(with/without hole)





78



Specification:

Suitable for PCB 15mm

Max. LED power: 14.4w/m

Installation: Wall/Ceiling recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, white coated *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 86.6mm, (H) 16mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



Model 78



PMMA Diffuser

(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)



PC Diffuser

(Opal, light trans. >52%)

Installing accessories:




Bolt
Cor

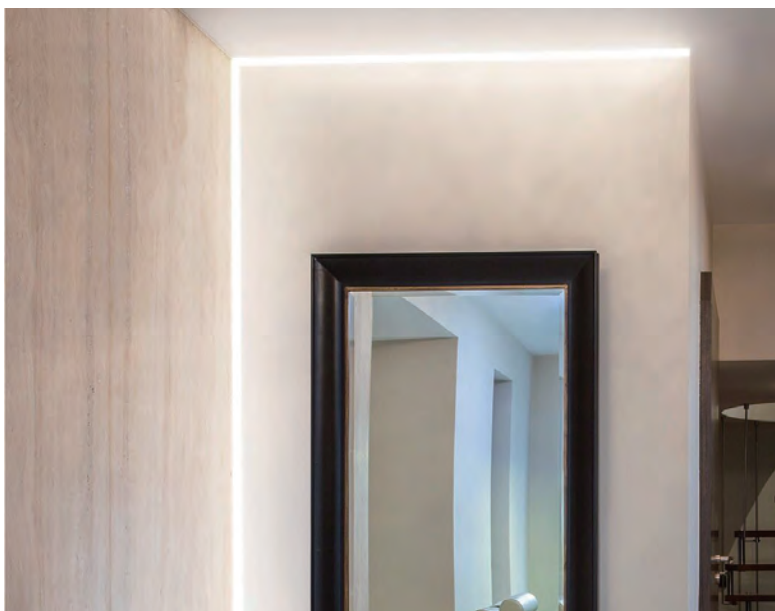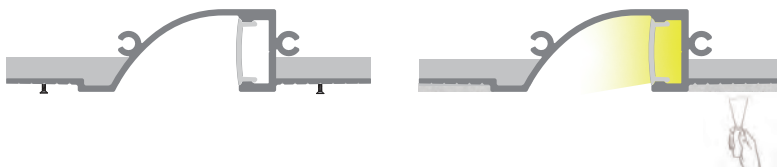


Catalogue

1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	<i>BEND & CURVED</i>



59

Page 193



59



Specification:

Suitable for PCB 15mm

Max. LED power: 14.4w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 19.4mm, (H) 6.5mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 3000mm.

Aluminium Profile



Model 59




Bending machine



PMMA Diffuser

(Opal, light trans. >68%)

(Frost, light trans. >83%)

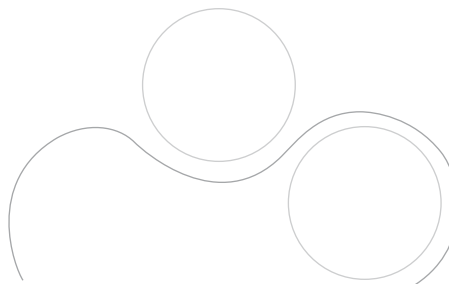



Installing accessories:




Aluminium Endcap
(with/without hole)



Metal Clip

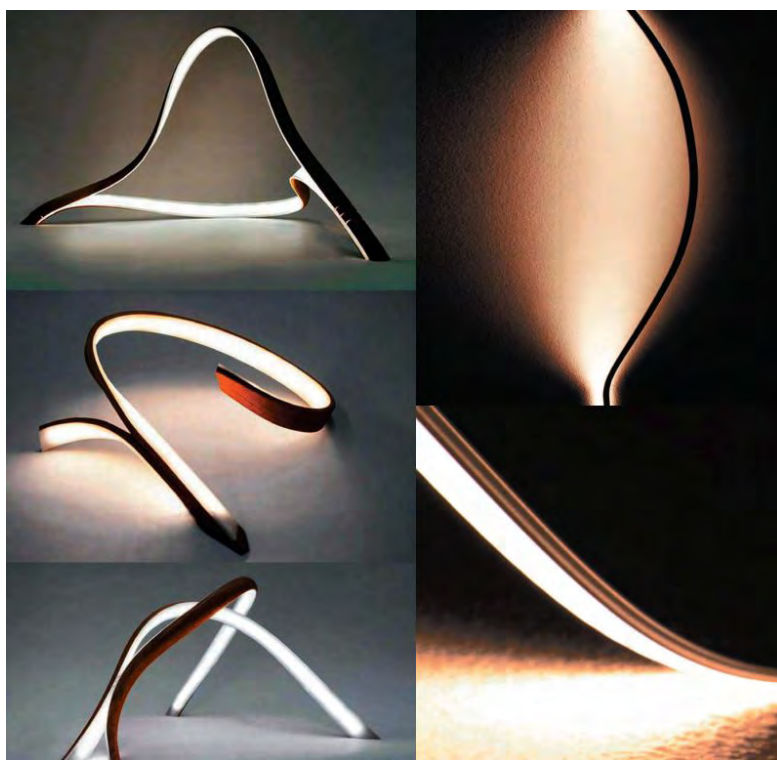

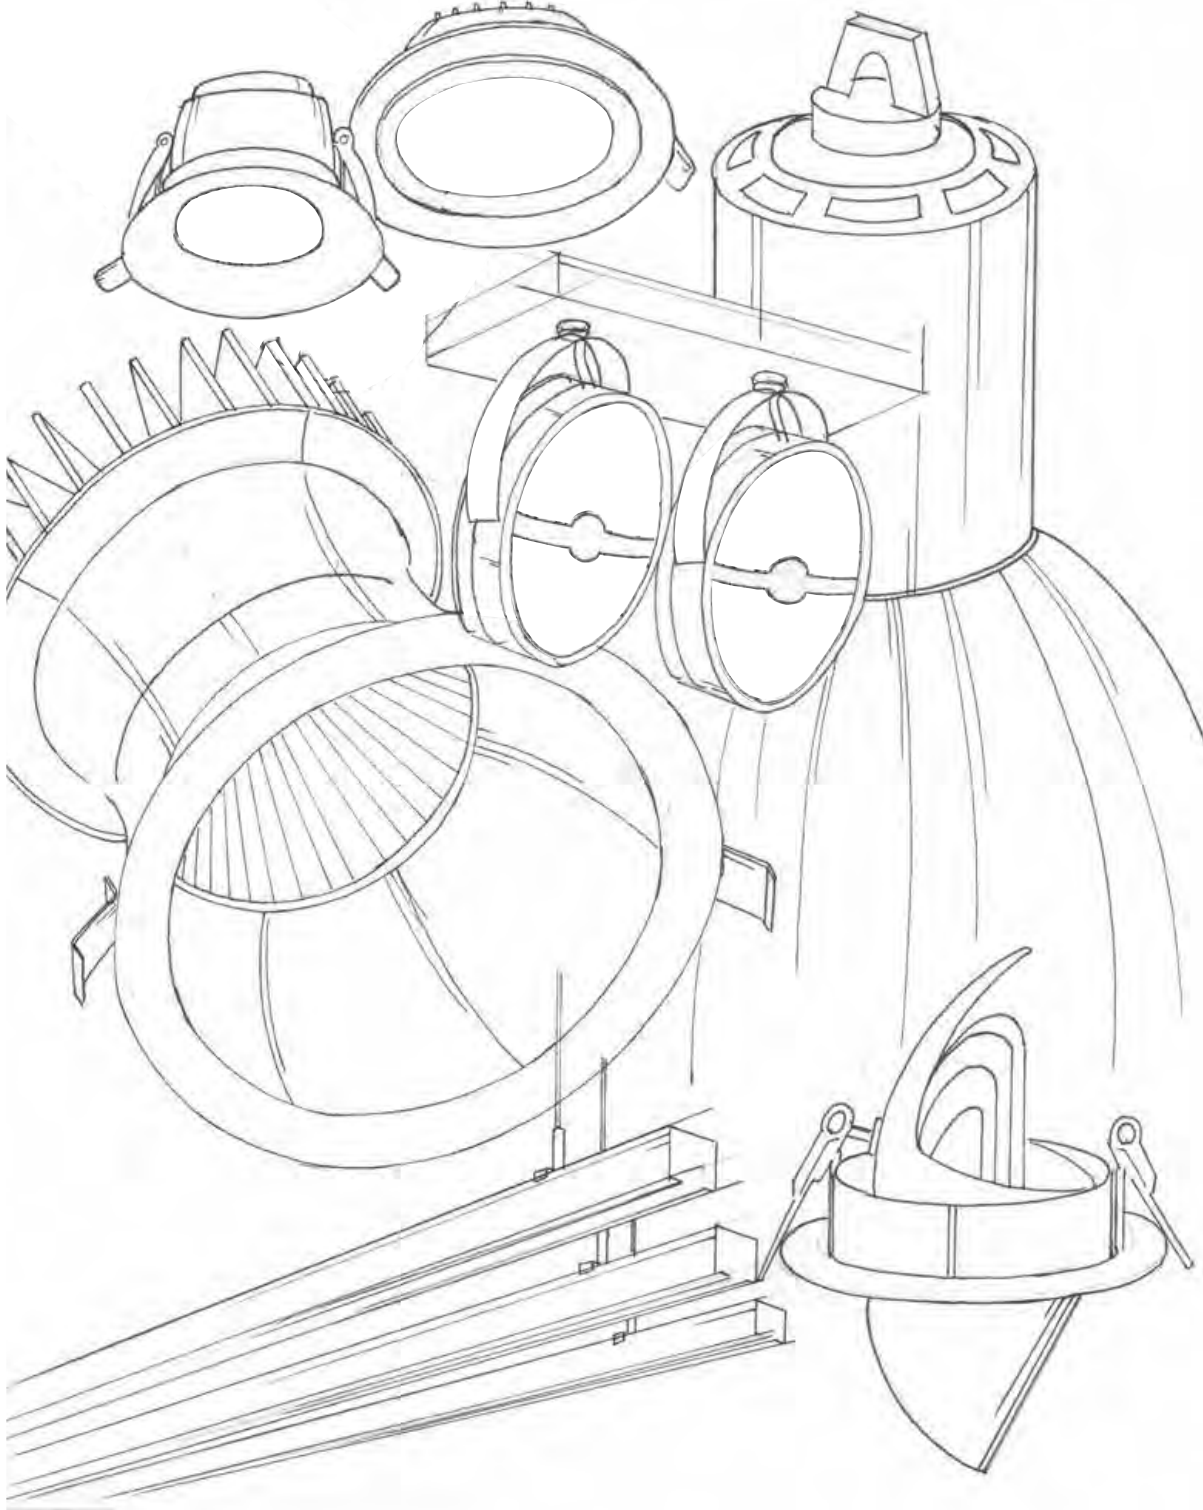

Ondernemingsweg 50a • 1422 DZ Uithoorn • +31 (0)297-820 881 • www.ledsign.nl

Aan deze catalogus kunnen geen rechten worden ontleend. Niets uit deze catalogus mag worden overgenomen of gebruikt zonder uitdrukkelijke toestemming van LEDSign © Copyright LEDSign Uithoorn - Nederland