




# SURFACE & SUSPENSION-ARCHITECTURAL




20  
Page 143




70F  
Page 145




70S  
Page 145




70SH  
Page 145




69F  
Page 147




69S  
Page 147




69SH  
Page 147




72F  
Page 149




72S  
Page 149




73F  
Page 151




74F  
Page 153




55  
Page 155



73S  
Page 151



74S  
Page 153




79  
Page 157



**Aluminium Profile**



**Model 20**



**Specification:**

Suitable for PCB 24mm	
Max. LED power:	38.4*2w/m
Installation:	Surface /Suspended
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous**
Size:	Profile (W) 25mm, (H) 120mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 4000mm.	



**PMMA Diffuser**  
(Opal, light trans. >55%)

## Installing accessories:



Screwless aluminum Cap  
(without hole)



Suspension Kits



(Optional)

Wall Clips



(Optional)

Joiners 90°A




(Optional)



Joiners 180°A




(Optional)

Joiners 120°A

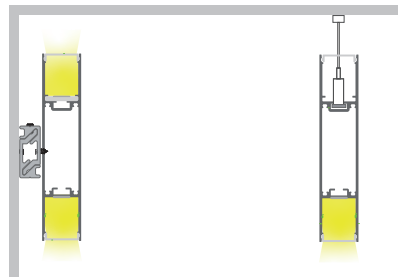

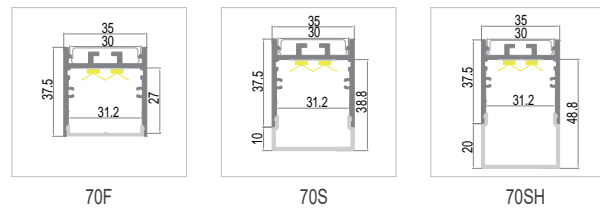

**Aluminium Profile**



**Model 70F**



**Model 70S**



**Model 70SH**

**Specification:**

Suitable for PCB	20mm / 30mm / 30mm
Max. LED power:	38.4w/m
Installation:	Surface /Suspended
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 35mm, (H) 37.5mm
Driver installation:	Remote driver required

\* Custom powder coated colour upon request. Surcharge apply.

\*\* Profile sold per metre. Can be cut to suit any length up to 6000mm.



**PMMA Diffuser**  
 (Opal, light trans. >63%)  
 (New opal, light trans. >74%)  
 (Frost, light trans. >89%)  
 (Clear, light trans. >95%)



**Black Diffuser**  
 (Black, light trans. >22%)





**PMMA Diffuser**  
 (Opal, light trans. >60%)




**PMMA Diffuser**  
 (Opal, light trans. >60%)

## Installing accessories:


	Aluminium Endcap (with/without hole)		Suspension Kits
	Aluminium Endcap (without hole)		Wall Clips <small>(Optional)</small>
	Aluminium Endcap (without hole)		Aluminium diffuser <small>(Optional)</small>
	Aluminum Screwless Endcap (with/without hole) <small>(Optional)</small>		Joiners 90°A <small>(Optional)</small>
	Joiners 120°A <small>(Optional)</small>		Joiners 180°A <small>(Optional)</small>
	Metal Clip <small>(Optional)</small>		

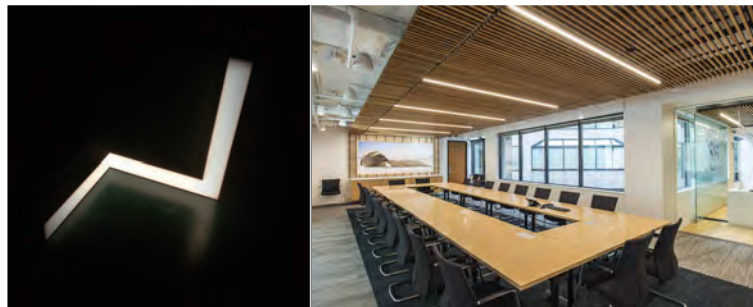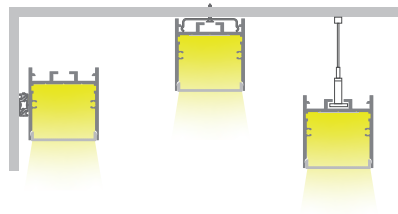







69F



69S



69SH



90°

**Aluminium Profile**



**Model 69F**



**Model 69S**



**Model 69SH**

**Specification:**

Suitable for PCB	30mm / 25mm / 25mm
Max. LED power:	38.4w/m
Installation:	Surface /Suspended
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 35mm, (H) 25.4mm
Driver installation:	Remote driver required

\* Custom powder coated colour upon request. Surcharge apply.

\*\* Profile sold per metre. Can be cut to suit any length up to 6000mm.



**PMMA Diffuser**  
 (Opal, light trans. >63%)  
 (New opal, light trans. >74%)  
 (Frost, light trans. >89%)  
 (Clear, light trans. >95%)




**PMMA Diffuser**  
 (Opal, light trans. >63%)



**PMMA Diffuser**  
 (Opal, light trans. >60%)


## Installing accessories:

	Aluminium Endcap (with/without hole)		Suspension Kits
	Aluminium Endcap (without hole)		Metal Clip <small>(Optional)</small>
	Aluminium Endcap (without hole)		Joiners 90°A <small>(Optional)</small>
	Joiners 120°A <small>(Optional)</small>		Joiners 180°A <small>(Optional)</small>

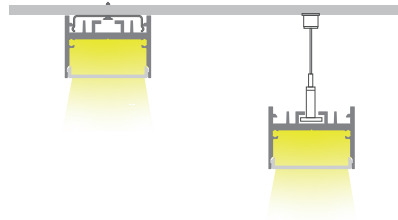




## Aluminium Profile

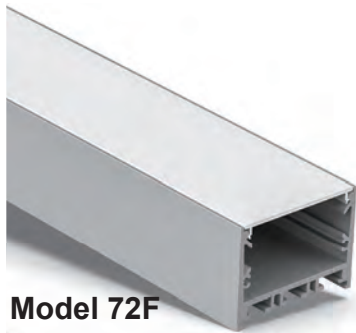


Model 72F



Model 72S



72F



72S



80°

### Specification:

Suitable for PCB 40mm / 30mm

Max. LED power: 38.4w/m / 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White \*

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous \*\*

Size: Profile (W) 50mm, (H) 37.5mm

Driver installation: Remote driver required

\* Custom powder coated colour upon request. Surcharge apply.

\*\* Profile sold per metre. Can be cut to suit any length up to 6000mm.



#### PMMA Diffuser

(Opal, light trans. >60%)

(New opal, light trans. >74%)



#### Black Diffuser

(Black, light trans. > 22%)



#### PMMA Diffuser


(Opal, light trans. >60%)



## Installing accessories:



Aluminium Endcap  
(with/without hole)



Aluminium Endcap  
(with/without hole)



(Optional)

Screwless aluminum Cap  
(with/without hole)



(Optional)

Joiners 90°A



(Optional)

Joiners 120°A



Suspension Kits



(Optional)

Wall Clips



(Optional)

Aluminium diffuser





(Optional)

Joiners 180°B




(Optional)

Joiners 180°A

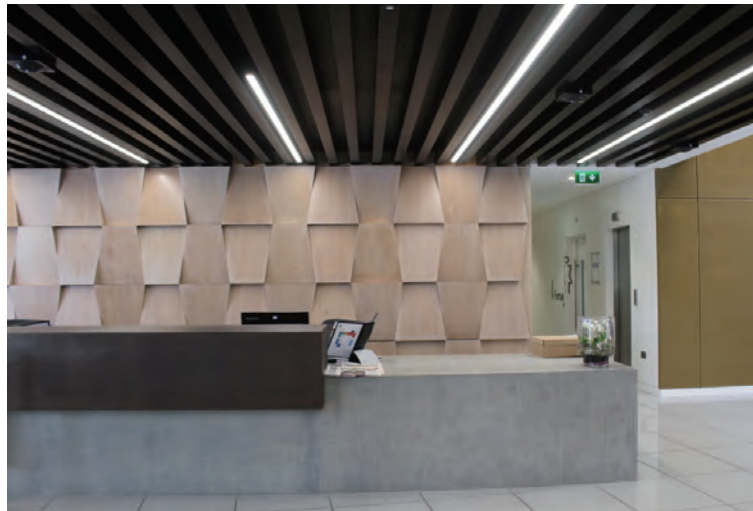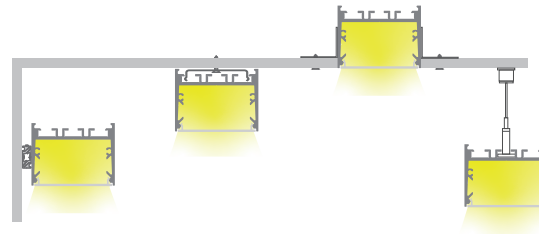





**Aluminium Profile**



73F



73S



**Specification:**

Suitable for PCB	25mm / 45mm
Max. LED power:	57.6w/m
Installation:	Surface /Suspended
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 60mm, (H) 37.5mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 6000mm.	



**Model 73F**



**Model 73S**




**PMMA Diffuser**  
(New opal, light trans. >74%)




**PMMA Diffuser**  
(Opal, light trans. >60%)


## Installing accessories:

	Aluminium Endcap (with/without hole)		Suspension Kits
	Aluminium Endcap (with/without hole)		Screwless aluminum Cap (with/without hole)
	Wall Clips  (Optional)		Screwless aluminum Cap (with/without hole)
	Joiners 90°A  (Optional)		Joiners 90°B
	Joiners 120°A  (Optional)		Joiners 120°B
	Joiners 180°B  (Optional)		Aluminium diffuser
	Joiners 180°A  (Optional)		

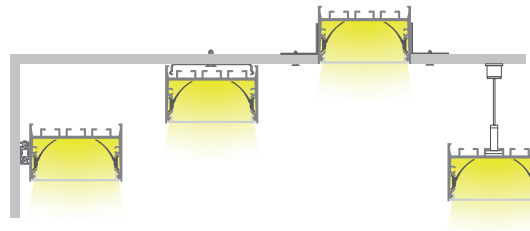



74F



74S



**Specification:**

Suitable for PCB	45mm / 25mm
Max. LED power:	57.6w/m
Installation:	Surface /Suspended
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 80mm, (H) 37.5mm
Driver installation:	Remote driver required

\* Custom powder coated colour upon request. Surcharge apply.  
 \*\* Profile sold per metre. Can be cut to suit any length up to 6000mm.

**Aluminium Profile**



**Model 74F**



**Model 74S**





**PMMA Diffuser**  
(New opal, light trans. >74%)




**PMMA Diffuser**  
(Opal, light trans. >60%)

## Installing accessories:

	Aluminium Endcap (with/without hole)		Suspension Kits
	Aluminium Endcap (with/without hole)	 (Optional)	Screwless aluminum Cap (with/without hole)
 (Optional)	Aluminium diffuser (Optional)	 (Optional)	Screwless aluminum Cap (with/without hole)
 (Optional)	Wall Clips (Optional)	 (Optional)	Joiners 90°B
 (Optional)	Joiners 90°A (Optional)	 (Optional)	Joiners 120°B
 (Optional)	Joiners 120°A (Optional)	 (Optional)	Joiners 180°A
 (Optional)	Joiners 180°B (Optional)		

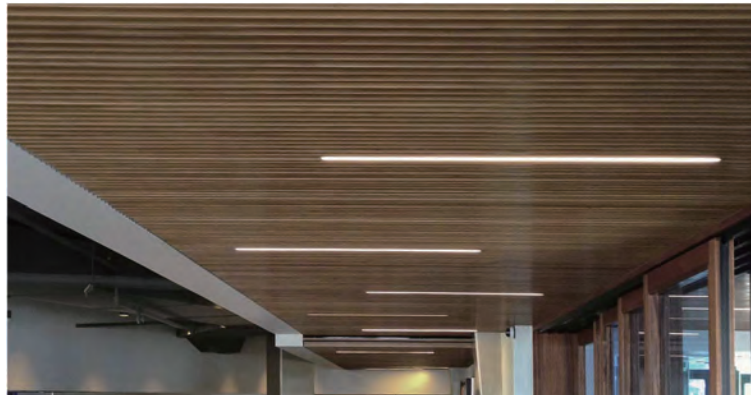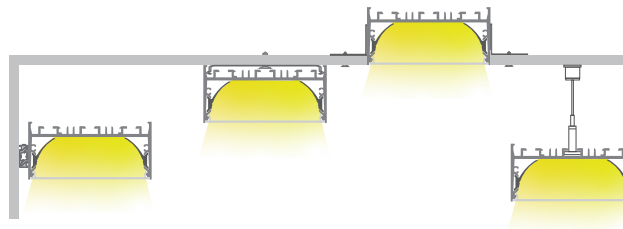





**Aluminium Profile**



**Model 55**

**Specification:**

Suitable for PCB 40mm	
Max. LED power:	57.6w/m
Installation:	Surface /Suspended
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PC flexible diffuser
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 102mm, (H) 31mm
Driver installation: Remote driver required	
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 4000mm.	



**PC Diffuser**  
(Opal, light trans. >55%)


**Installing accessories:**




Aluminium Endcap  
(without hole)




Suspension Kits

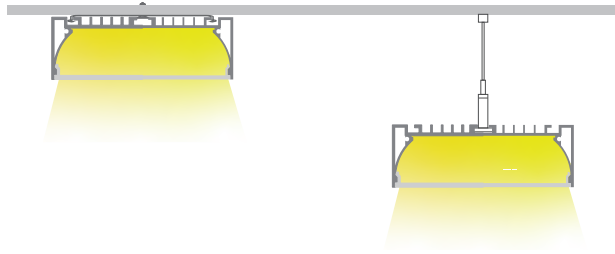



79



115°

**Aluminium Profile**



**Model 79**

**Specification:**

Suitable for PCB 80mm	
Max. LED power:	57.6w/m
Installation:	Corner Surface /Suspended
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 90mm, (H) 37.5mm
Driver installation: Remote driver required	
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 6000mm.	



**PMMA Diffuser**  
(New opal, light trans. >74%)

## Installing accessories:



Aluminium Endcap  
(without hole)



Suspension Kits

