SURFACE



8
Page 11



10
Page 13



12
Page 15



13
Page 17



19
Page 19



18
Page 21



52
Page 11



21
Page 11



39
Page 23



22
Page 25



14
Page 29



15
Page 29

LED•Sign
YOUR LIGHTING COMPANY

Surface Series

Aluminium Profile

Model 8

Model 52

Model 21



8



52



21



Specification:

Suitable for PCB:	12mm
Max. LED power:	14.4w/m
Installation:	Surface
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 17.1mm, (H) 8.5mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser
(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)

PC Diffuser
(Opal, light trans. >50%)

PMMA Diffuser
(Milky, light trans. >65%)

PC Diffuser
(Clear, light trans. >94%)

Black Diffuser
(Black, light trans. > 22%)

Installing accessories:

	Plastic Endcap (with/without hole)		Metal Clip
	Plastic Endcap (with/without hole)	(Optional)	Plastic Clip
	Plastic Endcap (with/without hole)	(Optional)	Adjustable Clip (0-222° rotation)

Surface Series

LED•Sign
YOUR LIGHTING COMPANY

Aluminium Profile

Model 10



10

Specification:

Suitable for PCB:	12mm
Max. LED power:	19.2w/m
Installation:	Surface
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 17.1mm, (H) 15.2mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser
(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)

PC Diffuser
(Opal, light trans. >50%)

Black Diffuser
(Black, light trans. > 22%)

Installing accessories:

	Plastic Endcap (with/without hole)		Metal Clip
 (Optional)	Adjustable Clip (0-222° rotation)	 (Optional)	Plastic Clip

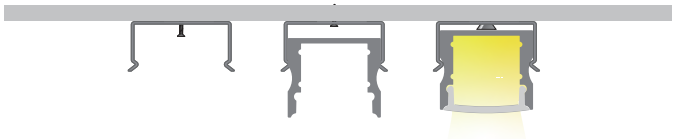

Surface Series

LED Sign
YOUR LIGHTING COMPANY

Surface Series

Aluminium Profile

Model 12



12

Specification:

Suitable for PCB :	20mm
Max. LED power:	19.2w/m
Installation:	Surface
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 23.5mm, (H) 10.9mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser
(Opal, light trans. >52%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)

Black Diffuser
(Black, light trans. > 22%)

Installing accessories:

	Plastic Endcap (with/without hole)		Metal Clip
 (Optional)	Adjustable Clip (0-222° rotation)	 (Optional)	Plastic Clip



Surface Series

Aluminium Profile

Model 13



13



Specification:

Suitable for PCB:	10mm
Max. LED power:	14.4w/m
Installation:	Surface
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PC flexible diffuser
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 15.9mm, (H) 6mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PC Diffuser
(Opal, light trans. >50%)
(Frost, light trans. >65%)

Installing accessories:

Plastic Endcap
(with/without hole)

Metal Clip

(Optional)

Adjustable Clip
(0-222° rotation)

Surface Series

LED Sign
YOUR LIGHTING COMPANY

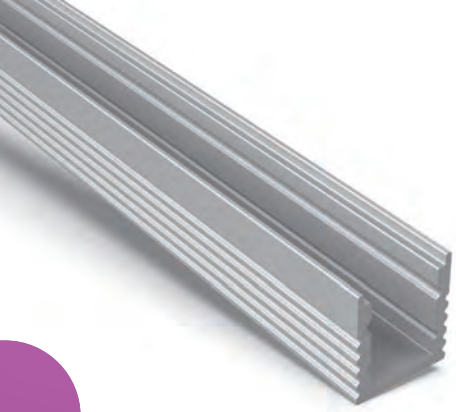

Aluminium Profile

Model 19

For 2110 120led 4mm strip only.



19

Specification:

Suitable for PCB:	5mm
Max. LED power:	9.6w/m
Installation:	Surface
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PC flexible diffuser
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 5.7mm, (H) 9mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.

PC Diffuser
(Opal, light trans. >50%)
(Clear, light trans. >94%)

Black Diffuser
(Black, light trans. > 22%)

Installing accessories:

Plastic Endcap
(with/without hole)

Metal Clip

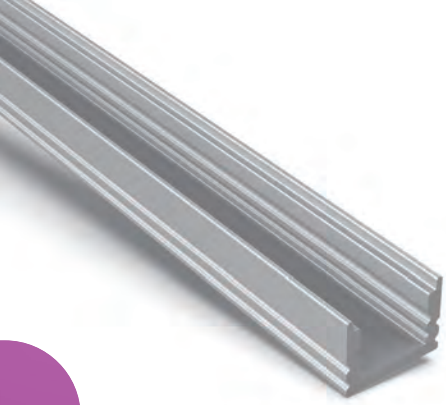

Aluminium Profile

Model 18

For 2110 120led 4mm strip only.



18

Specification:

Suitable for PCB:	5mm
Max. LED power:	9.6w/m
Installation:	Surface
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PC flexible diffuser
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 5.7mm, (H) 6mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.

PC Diffuser
(Opal, light trans. >50%)
(Clear, light trans. >94%)

Installing accessories:

Plastic Endcap
(with/without hole)

Only 6mm height, SMALLEST in profiles range

Aluminium Profile

Model 39



39

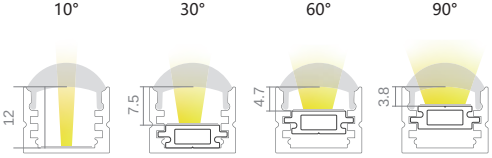

Specification:

Suitable for PCB:	10mm
Max. LED power:	19.2w/m
Installation:	Surface
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PC flexible diffuser
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 17.1mm, (H) 17.8mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.

PC Diffuser
(Clear, light trans. >94%)

Installing accessories:

	Plastic Endcap (with/without hole)		Metal Clip
 (Optional)	Adjustable Clip (0-222° rotation)	 (Optional)	Plastic Clip

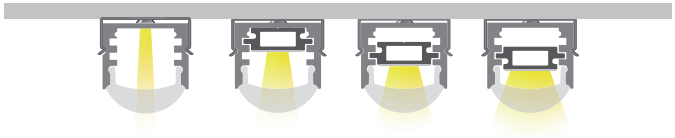

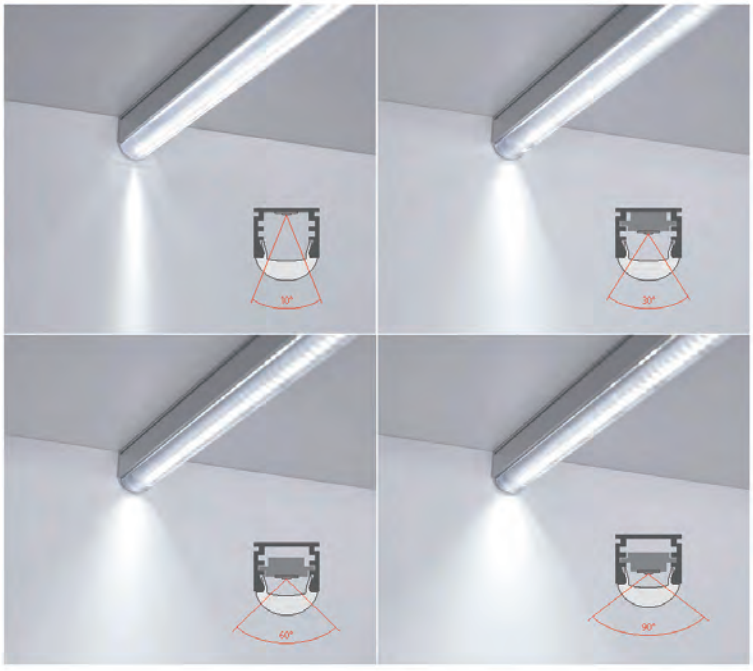

Aluminium Profile

Model 22



22



Specification:

Suitable for PCB:	12mm
Max. LED power:	19.2w/m
Installation:	Surface
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PC flexible diffuser
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 16mm, (H) 15.4mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PC Diffuser
(Opal, light trans. >50%)

Installing accessories:

Aluminium Endcap
(with/without hole)

Metal Clip

(Optional)

Adjustable Clip
(0-222° rotation)

Aluminium Profile

Model 14

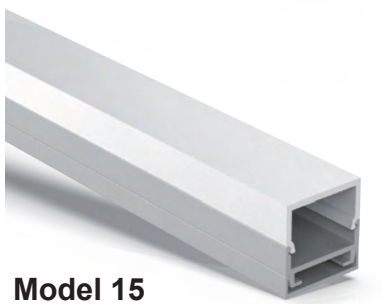

Model 15



14



15

Specification:

Suitable for PCB 15mm	
Max. LED power:	19.2w/m
Installation:	Surface
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 19.5mm, (H) 20.3mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.

PMMA Diffuser
(Opal, light trans. >52%)
(Frost, light trans. >72%)

PMMA Diffuser
(Opal, light trans. >52%)
(Frost, light trans. >72%)

Black Diffuser
(Black, light trans. > 22%)

Installing accessories:

Plastic Endcap
(with/without hole)
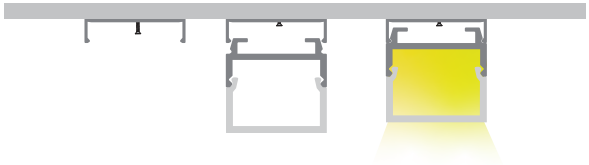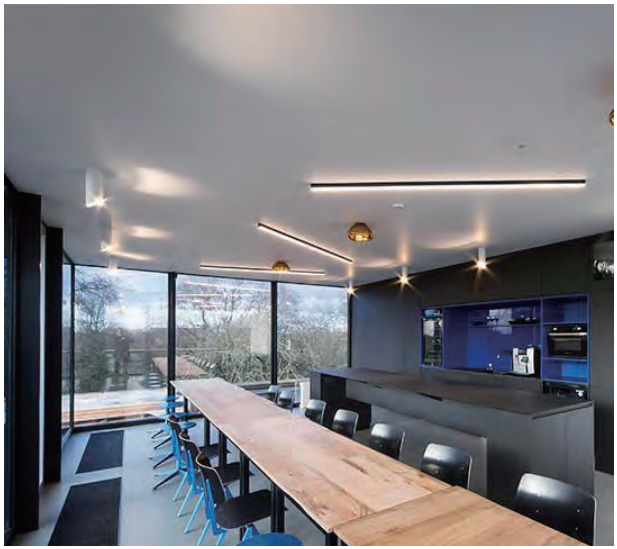
Plastic Endcap
(with/without hole)