

40
Page 133



41
Page 135



42
Page 137



43
Page 139

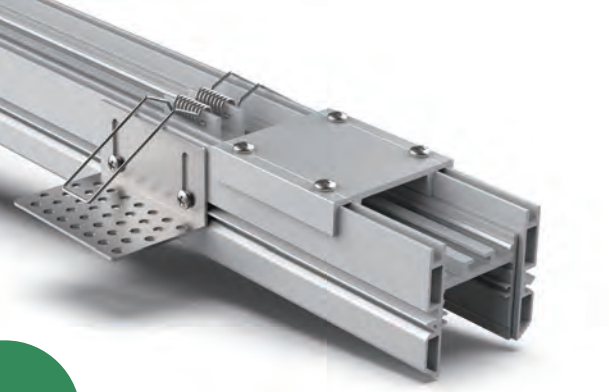

Aluminium Profile

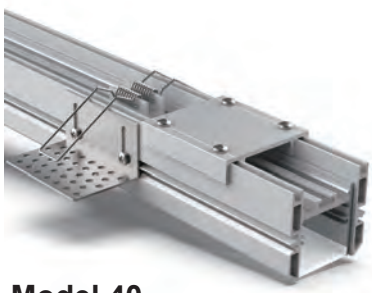

Model 40



40

Specification:

Suitable for PCB 30mm	
Max. LED power:	28.8w/m
Installation:	Ceiling trimless
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 54mm, (H) 48mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser
(Opal, light trans. >63%)
(New opal, light trans. >74%)
(Frost, light trans. >89%)
(Clear, light trans. >95%)

Installing accessories:

	Aluminium Endcap (without hole)		Aluminum Endcap (without hole)
	Stainless Steel L bracket		Alum. bridge base
	Spring Clip	(Optional)	Joiners 180°A
(Optional)	Joiners 90°A	(Optional)	Joiners 120°A

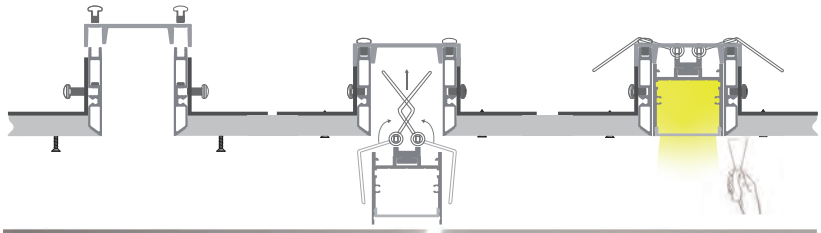

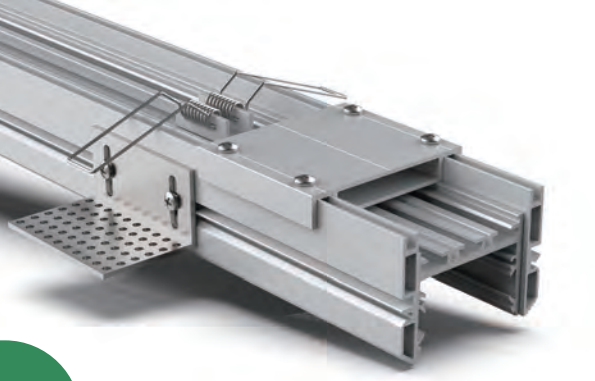

Aluminium Profile

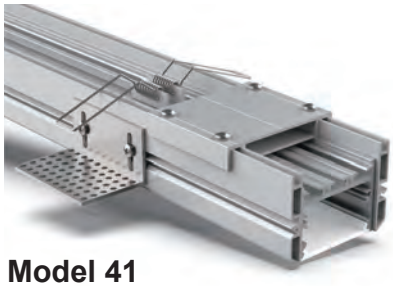

Model 41



41

Specification:

Suitable for PCB 45mm	
Max. LED power:	38.4w/m
Installation:	Ceiling trimless
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White*
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous**
Size:	Profile (W) 67mm, (H) 48mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser
(Opal, light trans. >60%)
(New opal, light trans. >77%)

Installing accessories:

	Aluminium Endcap (without hole)		Aluminum Endcap (without hole)
	Stainless Steel L bracket		Alum. bridge base
	Spring Clip	(Optional)	Joiners 180°A
(Optional)	Joiners 90°A	(Optional)	Joiners 180°B
(Optional)	Joiners 120°A		

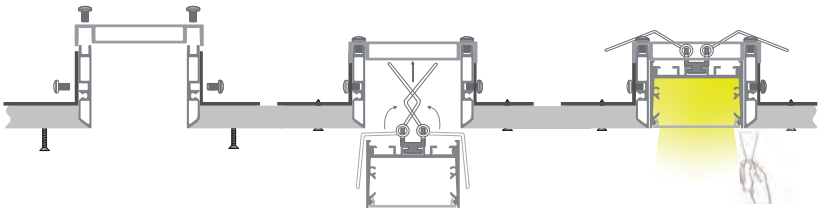

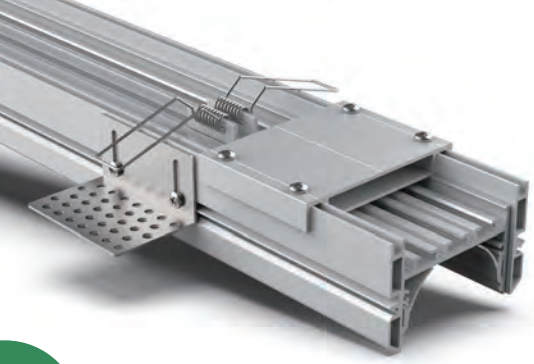

Aluminium Profile

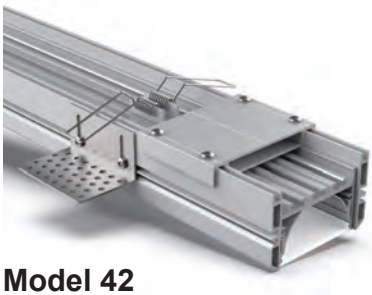

Model 42



42

Specification:

Suitable for PCB 55mm	
Max. LED power:	57.6w/m
Installation:	Ceiling trimless
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 76mm, (H) 48mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser
(New opal, light trans. >74%)

Installing accessories:

	Aluminium Endcap (without hole)		Aluminum Endcap (without hole)
	Stainless Steel L bracket		Alum. bridge base
	Spring Clip	(Optional)	Joiners 180°A
(Optional)	Joiners 90°A	(Optional)	Joiners 180°B
(Optional)	Joiners 120°A		

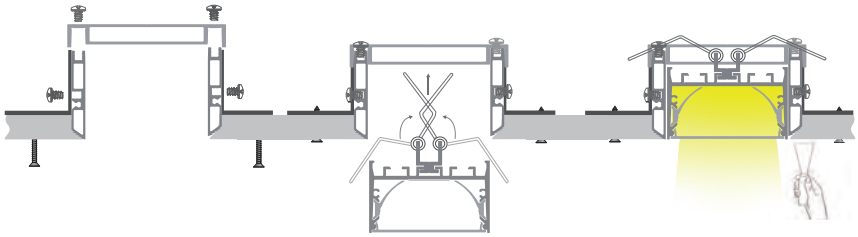

TRIMLESS-ARCHITECTU RAL

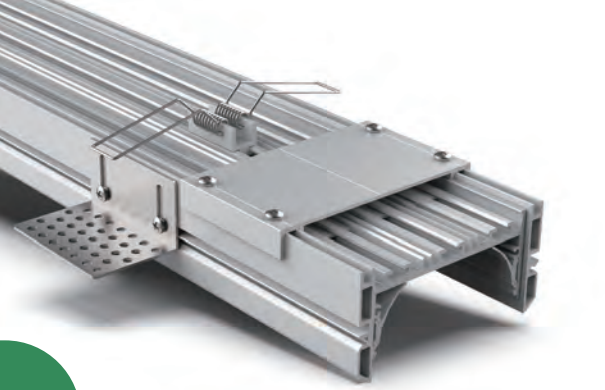

Aluminium Profile

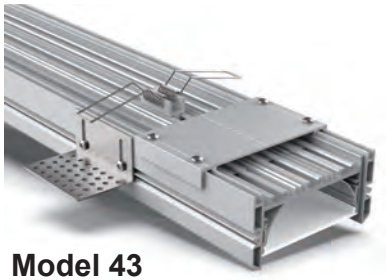

Model 43



43

Specification:

Suitable for PCB 75mm	
Max. LED power:	57.6w/m
Installation:	Ceiling trimless
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 96mm, (H) 48mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser
(New opal, light trans. >74%)

Installing accessories:

	Aluminium Endcap (without hole)		Aluminum Endcap (without hole)
	Stainless Steel L bracket		Alum. bridge base
	Spring Clip	(Optional)	Joiners 180°A
(Optional)	Joiners 90°A	(Optional)	Joiners 180°B
(Optional)	Joiners 120°A		

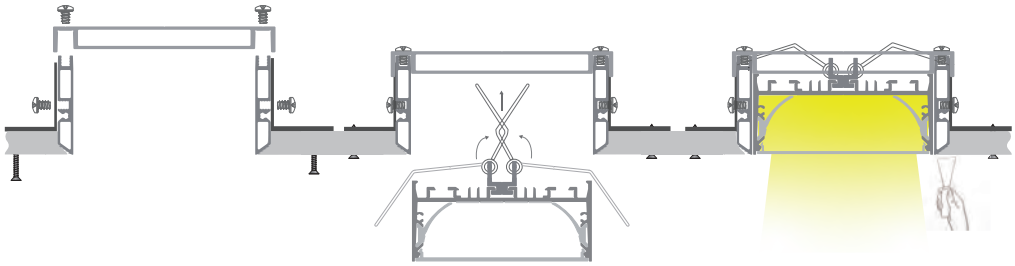

PLASTER IN TRIMLESS



83
Page 175



84
Page 177



85
Page 179



86
Page 181



87
Page 183



88
Page 185



89
Page 187



78
Page 189

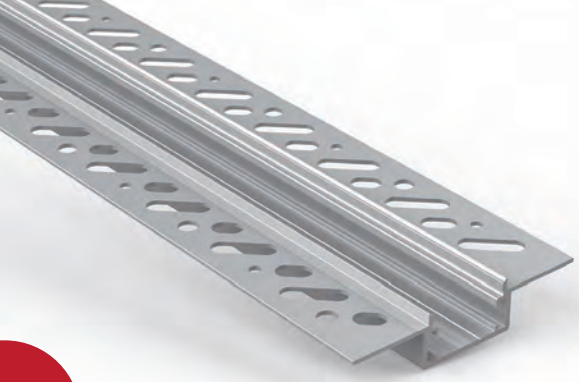



83

Aluminium Profile

Specification:

Suitable for PCB 16mm	
Max. LED power:	19.2w/m
Installation:	Plaster in Trimless
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 66.4mm, (H) 16.4mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.

Model 83

PMMA Diffuser
(Opal, light trans. >52%)

Installing accessories:

	Plastic Endcap (with/without hole)	 (Optional)	Joiners 90°B
 (Optional)	Joiners 90°A	 (Optional)	Joiners 120°B
 (Optional)	Joiners 120°A	 (Optional)	Joiners 180°A



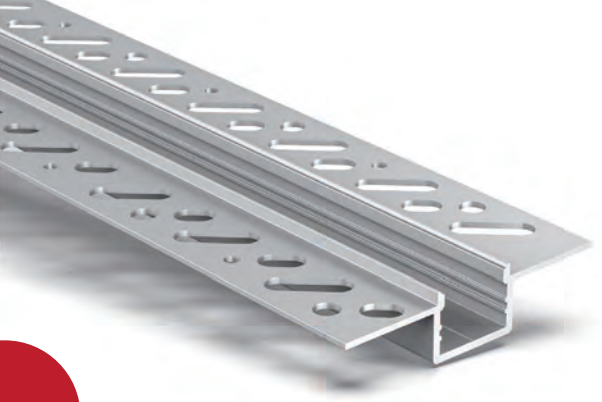

Aluminium Profile

Model 84



84

Specification:

Suitable for PCB 16mm	
Max. LED power:	19.2w/m
Installation:	Plaster in Trimless
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 59mm, (H) 13.6mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.

PMMA Diffuser
(Opal, light trans. >52%)

Black Diffuser
(Black, light trans. > 22%)

Installing accessories:

Plastic Endcap
(with/without hole)



85

Aluminium Profile

Model 85

Specification:

Suitable for PCB 16mm	
Max. LED power:	19.2w/m
Installation:	Plaster in Trimless
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 38.8mm, (H) 13.6mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.

PMMA Diffuser
(Opal, light trans. >52%)

Installing accessories:

Plastic Endcap
(with/without hole)

Aluminium Profile

Model 86



86

Specification:

Suitable for PCB 16mm	
Max. LED power:	19.2w/m
Installation:	Plaster in Trimless, Inside corner
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 49.8mm, (H) 26.1mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.

PMMA Diffuser
(Opal, light trans. >52%)

Black Diffuser
(Black, light trans. > 22%)

Installing accessories:

Plastic Endcap
(with/without hole)





Aluminium Profile

Model 87



87

Specification:

Suitable for PCB 16mm	
Max. LED power:	19.2w/m
Installation:	Plaster in Trimless, Outside corner
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 56.6mm, (H) 23.7mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.

PMMA Diffuser
(Opal, light trans. >52%)

Black Diffuser
(Black, light trans. > 22%)

Installing accessories:

Plastic Endcap
(with/without hole)





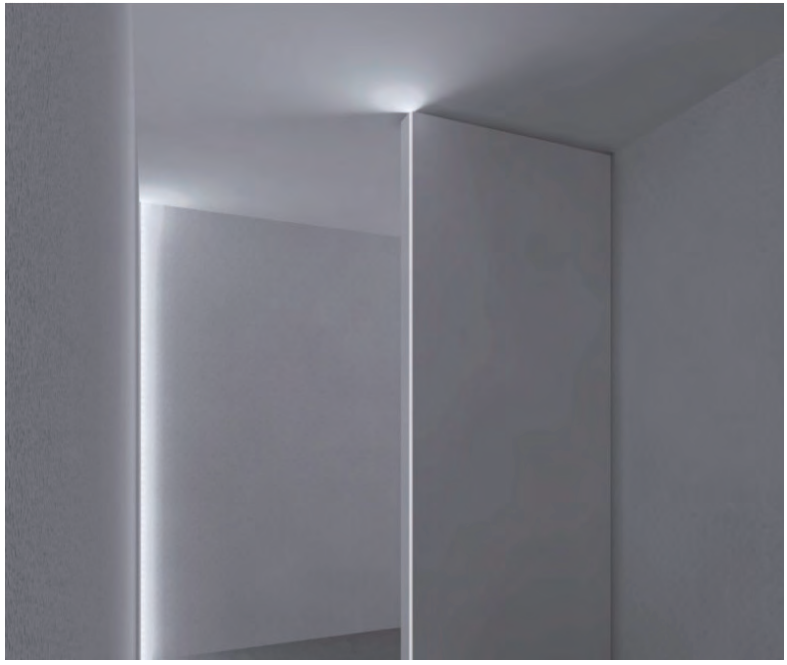

Aluminium Profile

Model 88



88

Specification:

Suitable for PCB 10mm	
Max. LED power:	19.2w/m
Installation:	Plaster in Trimless
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 42.5mm, (H) 28.5mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.

PMMA Diffuser
(Opal, light trans. >52%)

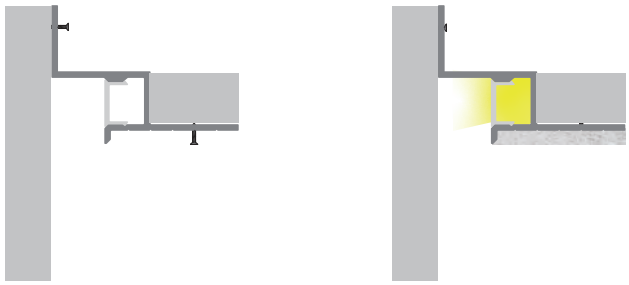

Aluminium Profile

Model 89



89

Specification:

Suitable for PCB 5mm	
Max. LED power:	9.6w/m
Installation:	Plaster in Trimless
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PC flexible diffuser
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 28mm, (H) 9mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.

PC Diffuser
(Opal, light trans. >50%)
(Clear, light trans. >94%)

Installing accessories:

Plastic Endcap
(with/without hole)



78

Aluminium Profile

Model 78

Specification:

Suitable for PCB 15mm	
Max. LED power:	14.4w/m
Installation:	Wall/Ceiling recessed
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, white coated *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 86.6mm, (H) 16mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser
(Opal, light trans. >52%)
(Milky, light trans. >65%)
(Frost, light trans. >81%)
(Clear, light trans. >95%)

PC Diffuser
(Opal, light trans. >52%)

Installing accessories:
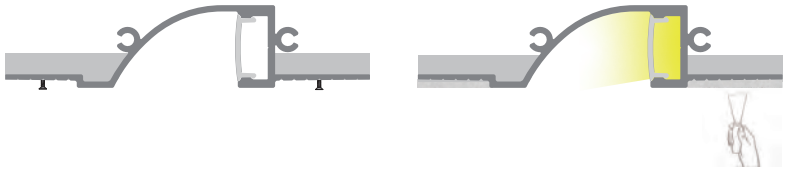
Bolt
Cor